

it2 INTELLIGENT TRANSFORMER

Control & schedule right from your phone


Connects with either WiFi or Bluetooth®

Manages up to 3 lighting zones




ALLIANCE IT Pro App Convenience

- Visual, on-screen programming. Set individual schedules for each zone.
- Create custom clock-based or dusk/dawn schedules, including multiple events in a 24-hour period. Automatic astronomic timing adjusts for seasonal changes.
- Convenient on/off remote control anytime, for any zone.
- Enable voice control with Amazon Alexa®.
- Share usage with multiple family members.
- Connects with Bluetooth or WiFi. WiFi is not required, but may expand range depending on homeowner's network. When transformer is connected to the cloud, it can be managed from anywhere in the world.
- Settings saved in the transformer and in the cloud in case of power interruption.

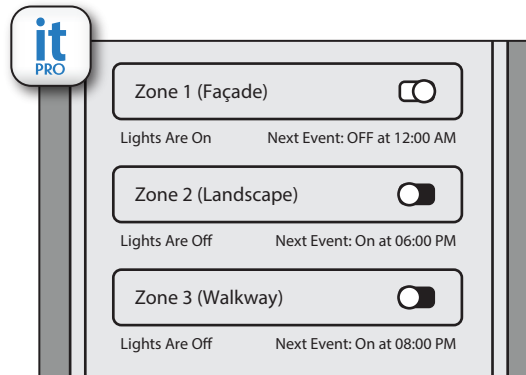

it PRO app dashboard to manage & configure zones

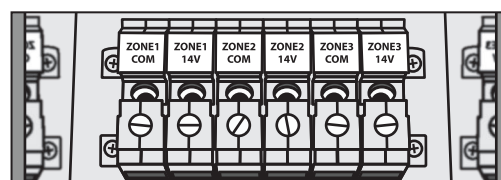

Zone labeled it2 terminal lugs

Control Up to 3 Different Zones

- Set different types of lighting to different schedules to accommodate activities. For example: 1 façade lights, 2 landscape lights, 3 walkway.
- Create different zone-based themes for security, visitors, entertaining, etc. Saves energy too.
- Connect each zone's cable run to the specific designated terminal.




SCAN HERE TO DOWNLOAD
Or search "Alliance it Pro"
in the app store.



Contractor Friendly Installation

- Easy-hang stainless enclosure with large wiring compartment, multiple knock-outs and angled terminal block. Enclosure latch accommodates user-supplied padlock, if desired.
- Manual on/off button allows maintenance checks without accessing app.
- Contractor can establish lighting schedule on his phone, then push settings to homeowner's device.
- Monitor electrical loads and easily troubleshoot faults using digital power meter in the app.

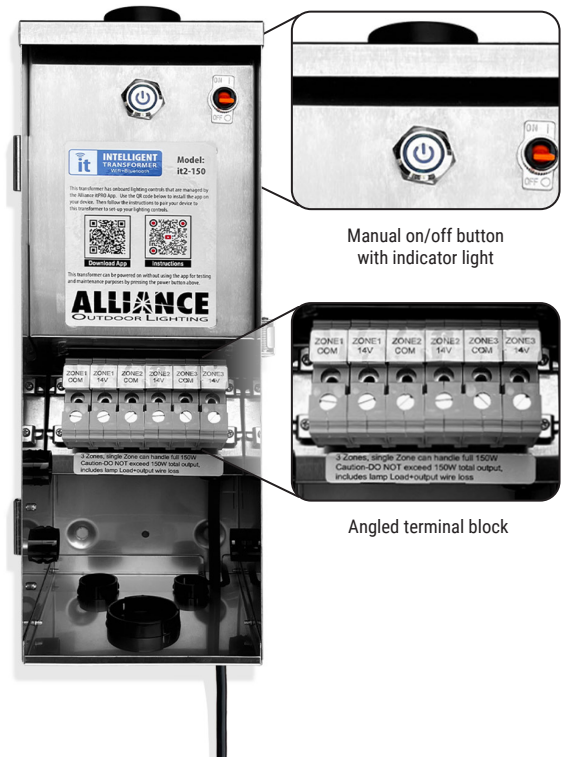

Manual on/off button with indicator light

Angled terminal block

Features & Specifications

- Large, integrated disc antenna for optimum range.
- Wi-Fi 802.11b, 2.4GHz and Bluetooth® 5 connections.
- Can integrate with Amazon Alexa® for voice control.
- IT Pro app is compatible with iOS or Android devices.
- 120 volt input, output 3 - 14V taps, one per zone.
- Do not exceed rated load of transformer. Total load may be portioned out to the different zone taps, or allocated to a single tap. (Example: 150-watt transformer can have 100 watts on zone 1 and 25 watts on zone 2 and 3; or 150 watts just on zone 1)
- 5' grounded heavy-gauge power cord
- Internal 25A breaker
- ETL Listed to U.S. & Canadian safety standards for low voltage landscape lighting (UL 1838)



Models and Dimensions

- IT2-150 (150 Watt)
14.75" H x 5.75" W x 5.75" D
- IT2-300 (300 Watt)
16.25" H x 7.75" W x 5.25" D



it2-150 (Closed)

it2-150 (Open)

Visit AllianceOutdoorLighting.com for more information.

ALLIANCE
OUTDOOR LIGHTING