


the it2 INTELLIGENT TRANSFORMER

"ALEXA,
TURN
ON MY
LIGHTS"

CONNECT WITH ALEXA
FOR VOICE CONTROL!

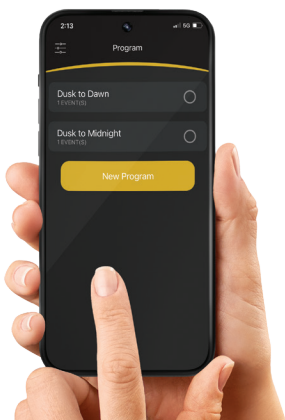

App Controlled Convenience

- **Visual, on-screen programming.** Set individual schedules for each zone.
- Create custom **clock-based** or **dusk/dawn** schedules, including multiple events in a 24-hour period. *Automatic astronomic timing adjusts for seasonal changes.*
- Convenient on/off **remote control** anytime, for any zone.
- Enable **voice control** with Amazon Alexa®.
- Share usage with multiple family members.
- Connects with **Bluetooth®** or **WiFi**. WiFi is not required, but may expand range depending on homeowner's network. When transformer is connected to the cloud, it can be managed from anywhere in the world.
- Settings saved in the transformer and in the cloud in case of power interruption.



Manual on/off with
indicator light



Angled terminal block

Contractor-friendly installation

- Easy-hang stainless enclosure with **large wiring compartment**, multiple knock-outs and **angled terminal block**. Enclosure latch accommodates user-supplied padlock, if desired.
- Manual on/off button allows maintenance checks without accessing app.
- Contractor can establish lighting schedule on his phone, then push settings to homeowner's device.
- Monitor electrical loads and easily troubleshoot faults using digital power meter in the app.

Control up to 3 Zones

- Set different types of lighting to different schedules to accommodate activities
- Create different zone-based themes for security, visitors, entertaining, etc. Saves energy too.
- Connect each zone's cable run to the specific designated terminal.



ALLIANCE
OUTDOOR LIGHTING

Features & Specifications

- Large, integrated disc antenna for optimum range.
- Wi-Fi 802.11b, 2.4GHz and Bluetooth® 5 connections.
- Can integrate with Amazon Alexa® for voice control.
- IT Pro app is compatible with iOS or Android devices.
- 120 volt input, output 3 - 14V taps, one per zone.
- Do not exceed rated load of transformer.
- Total load may be portioned out to the different zone taps, or allocated to a single tap. (Example: 150-watt transformer can have 100 watts on zone 1 and 25 watts on zone 2 and 3; or 150 watts just on zone 1)
- 5' grounded heavy-gauge power cord
- Internal 25A breaker
- ETL Listed to U.S. & Canadian safety standards for low voltage landscape lighting (UL 1838)



Models & Dimensions

- **IT2-150 (150 Watt)**
14.75" H x 5.75" W x 5.75" D
- **IT2-300 (300 Watt)**
16.25" H x 7.75" W x 5.25" D



IT2-150 (closed)

IT2-150 (open)



IT2-300 (closed)

IT2-300 (open)