

HARDSCAPES



ALLIANCE
OUTDOOR LIGHTING



Table of Contents

In-Ground Lights.....pgs 4-7

Ledge Lights.....pgs 8-11

Step Lights.....pgs 12-13

Bollardpgs 14-15

Tape Light.....pgs 16-17

Post Light.....pg 18

Wall Sconces.....pg 19

GL1xx Series Feature:

- Brass fixture, aged brass finish
- Clear convex lens
- Solid brass fixture base with two rubber gasket seals
- Solid brass faceplate with four screws
- Ceramic bi-pin socket
- Double wire lead pre-connected to the fixture, 16 awg (*UL listed*), brown
 - 25 foot wire lead, pre-stripped for easy wire connection
 - 18 inch wire lead, LED connection ready
- Lifetime warranty on fixture housing
- Available without a lamp

bt Fixture Features:

- Wattage: 2-8
- Operating Voltage Range: 10 -14
- Lumen Output: 15 - 350
- Beam Spread: 40°
- CRI: 80
- CCT Options: Preset options for 2700K, 3000K, 4000K
- RGB Options: Unlimited color wheel options with quick preset options
- Dimming: Dimming option available for every color choice
- Scenes: Customizable scene options with up to 3 colors per scene

GL-BASE

3.5 in. (8.9 cm) Width at Base Top
2.38 in. (6.0 cm) Width at Base Bottom
3.5 in (8.9 cm) Tall

Shrouded Top



GL100-bt

(Integrated Bluetooth Fixture)

GL100-LED6W

(6 watt MR16 LED lamp included)

GL100-LED5W

(5 watt MR16 LED lamp included)

GL100-LED4W

(4 watt MR16 LED lamp included)

Flat Top



GL150-bt

(Integrated Bluetooth Fixture)

GL150-LED6W

(6 watt MR16 LED lamp included)

GL150-LED5W

(5 watt MR16 LED lamp included)

GL150-LED4W

(4 watt MR16 LED lamp included)

Grated Top



GL160-bt

(Integrated Bluetooth Fixture)

GL160-LED6W

(6 watt MR16 LED lamp included)

GL160-LED5W

(5 watt MR16 LED lamp included)

GL160-LED4W

(4 watt MR16 LED lamp included)

Opposing Sides
Light Output



GL170-bt

(Integrated Bluetooth Fixture)

GL170-LED6W

(6 watt MR16 LED lamp included)

GL170-LED5W

(5 watt MR16 LED lamp included)

GL170-LED4W

(4 watt MR16 LED lamp included)

180° Light Output



GL180-bt

(Integrated Bluetooth Fixture)

GL180-LED6W

(6 watt MR16 LED lamp included)

GL180-LED5W

(5 watt MR16 LED lamp included)

GL180-LED4W

(4 watt MR16 LED lamp included)

360° Light Output



GL190-bt

(Integrated Bluetooth Fixture)

GL190-LED6W

(6 watt MR16 LED lamp included)

GL190-LED5W

(5 watt MR16 LED lamp included)

GL190-LED4W

(4 watt MR16 LED lamp included)

GL300-BASE

4.87 in. (12.3 cm) Width at Base Top
3.5 in. (8.9 cm) Width at Base Bottom
4.75 in. (12 cm) Base Height
0.5 in. (1.2 cm) Lip Height

GL3xx Features:

- Solid brass faceplate with four screws
- Clear glass lens
- Polycarbonate base with rubber gasket seal
- Ceramic bi-pin socket
- Swivel socket mount for angle adjustment
- 36” wire lead pre-connected to the fixture
- Lifetime warranty on fixture housing
- Available without a lamp

Flat Top



Shrouded Top



Domed Top



Grated Top



Opposing Sides
Light Output



180° Light Output



360° Light Output



bt Fixture Features:

- Wattage: 2-8
- Operating Voltage Range: 10 -14
- Lumen Output: 15 - 450
- Beam Spread: 40°
- CRI: 80
- CCT Options: Preset options for 2700K, 3000K, 4000K
- RGB Options: Unlimited color wheel options with quick preset options
- Dimming: Dimming option available for every color choice
- Scenes: Customizable scene options with up to 3 colors per scene

GL300-bt

(Integrated Bluetooth Fixture)

GL300-LED6W

(6 watt MR16 LED lamp included)

GL300-LED5W

(5 watt MR16 LED lamp included)

GL300-LED4W

(4 watt MR16 LED lamp included)

GL350-bt

(Integrated Bluetooth Fixture)

GL350-LED6W

(6 watt MR16 LED lamp included)

GL350-LED5W

(5 watt MR16 LED lamp included)

GL350-LED4W

(4 watt MR16 LED lamp included)

GL310-bt

(Integrated Bluetooth Fixture)

GL310-LED6W

(6 watt MR16 LED lamp included)

GL310-LED5W

(5 watt MR16 LED lamp included)

GL310-LED4W

(4 watt MR16 LED lamp included)

GL360-bt

(Integrated Bluetooth Fixture)

GL360-LED6W

(6 watt MR16 LED lamp included)

GL360-LED5W

(5 watt MR16 LED lamp included)

GL360-LED4W

(4 watt MR16 LED lamp included)

GL370-bt

(Integrated Bluetooth Fixture)

GL370-LED6W

(6 watt MR16 LED lamp included)

GL370-LED5W

(5 watt MR16 LED lamp included)

GL370-LED4W

(4 watt MR16 LED lamp included)

GL380-bt

(Integrated Bluetooth Fixture)

GL380-LED6W

(6 watt MR16 LED lamp included)

GL380-LED5W

(5 watt MR16 LED lamp included)

GL380-LED4W

(4 watt MR16 LED lamp included)

GL390-bt

(Integrated Bluetooth Fixture)

GL390-LED6W

(6 watt MR16 LED lamp included)

GL390-LED5W

(5 watt MR16 LED lamp included)

GL390-LED4W

(4 watt MR16 LED lamp included)

Features:

- Brass fixture, aged brass finish
- Mounting bracket, stainless steel, aged brass finish
- Optional frosted lens included
- 10' wire lead, 16 awg (UL Listed), brown, pre-connected to the fixture, pre-stripped for easy wire connection
- 10 Year warranty on LED components and fixture housing

Integrated LED strip:

- Beam Angle: 120°
- Beam Spread: Flood
- Color: Warm White
- Color Temperature: 2700K
- Operating Voltage: 10.8Vac ~ 15Vac
- CRI: Ra>80
- Rated Hours: 30,000
- Ambient Operating Temperature: -40°C ~ +85°C

SL65-LED

Integrated LED Step Light

LED strip, 4 chips

- Watts: 1.1w
- Light Output: 110 lm (Lumens)
- Halogen Equivalent: 10w



4 in (10.1 cm) Wide
3.5 in (8.9 cm) Deep

SL75-LED

Integrated LED Step Light

LED strip, 8 chips

- Watts: 3w
- Light Output: 120 lm (Lumens)
- Halogen Equivalent: 20w




6.8 in (17.2 cm) Wide
3.5 in (8.9 cm) Deep

SL85-LED

Integrated LED Step Light

LED strip, 12 chips

- Watts: 4w
- Light Output: 370 lm (Lumens)
- Halogen Equivalent: 30w

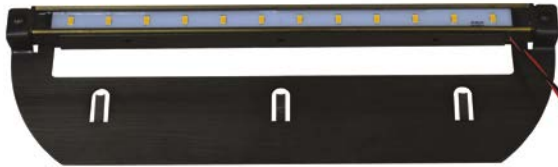

12 in (30.4 cm) Wide
3.5 in (8.9 cm) Deep

CHOOSE THE PERFECT SIZE

The 7" SL75-LED is our most popular and works for countless applications.
The 4" SL65-LED will work great on shorter walls and corners.
The 12" SL85-LED is ideal for taller walls and will provide a wider coverage area.



Glare shield included with every SL65-LED, SL75-LED and SL85-LED



Mounting bracket is removable for further applications.
Optional frosted lens is included with the fixture.




SL65-LED with glare shield installed.

LEDGE LIGHT INSTALLATION TIPS



Scan this QR Code to watch the installation video.


Use an existing joint to run the wire or use a grinder to create a new channel if needed

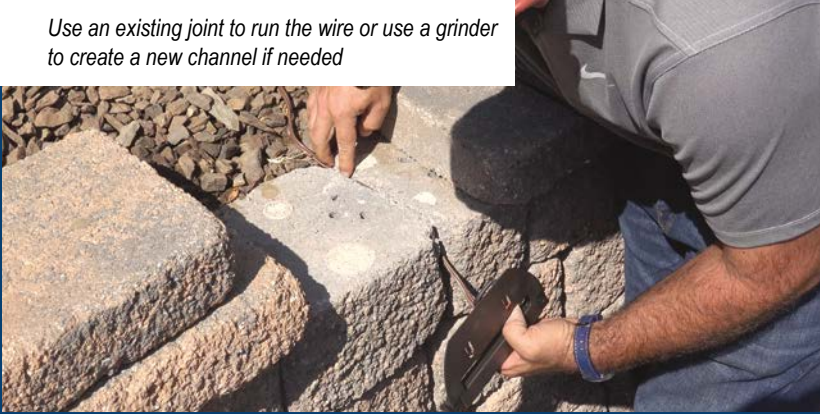

Be sure to leave slack at the front of the fixture in case a replacement is needed in the future.



Use the glare shield to reduce glare.

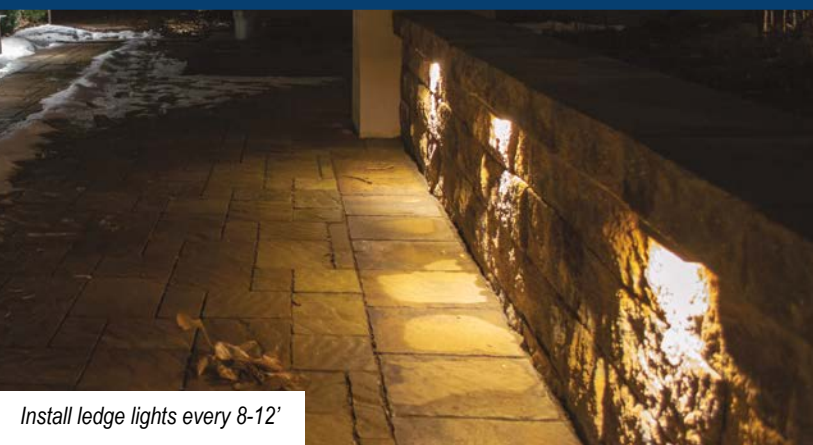

Install ledge lights every 8-12'

SL50-bt

(Integrated Bluetooth Fixture)

SL50-LED

(LBIPIN-LED-200lm lamp included)

Fixture Depth: 3.5 in. (8.9 cm)

Fixture Width: 5 in. (12.7 cm)

Lamp Housing Height: 1.5 in. (3.8 cm)

Lamp Housing Depth: 1.25 in. (3.1 cm)




SL60-bt

(Integrated Bluetooth Fixture)



For surface mounted applications.



Features:

- Brass fixture, aged brass finish
- Brass Mounting Plate (SL50-bt)
- Brass Surface Mount (SL60-bt)
- Frosted lens
- 25 Foot wire lead, 16 awg (UL listed), brown, pre-connected to the fixture, pre-stripped for easy wire connection
- Lifetime warranty on fixture housing
- 10 Year warranty on integrated LED

SL50-bt/SL60-bt Integrated LED:

- Wattage: 1-3
- Operating Voltage Range: 10 -14
- Lumen Output: 15 - 200
- Beam Spread: 120°
- CRI: 80
- CCT Options: Preset options for 2700K, 3000K, 4000K
- RGB Options: Unlimited color wheel options with quick preset options
- Dimming: Dimming option available for every color choice
- Scenes: Customizable scene options with up to 3 colors per scene





SL100/SL150 Features:

- Brass fixture, aged brass finish
- Solid brass face plate with securing hex screws
- Allen wrench tool to tighten hex screws
- Base plate with adjustable mounting guides
- Ceramic bi-pin socket
- Frosted lens
- 25 Foot wire lead, 16 awg (*UL listed*), brown, pre-connected to the fixture, pre-stripped for easy wire connection
- Mounting hardware screws
- Two extra adjusting hex face plate screws
- Lifetime warranty on fixture housing
- Available without a lamp

SL100-LED


(LBIPIN-LED-200lm lamp included)

Fixture Depth: 1.75 in. (4.4 cm)
Fixture Diameter: 3.4 in. (8.6 cm)



Fits a Standard 4" Post

Front View

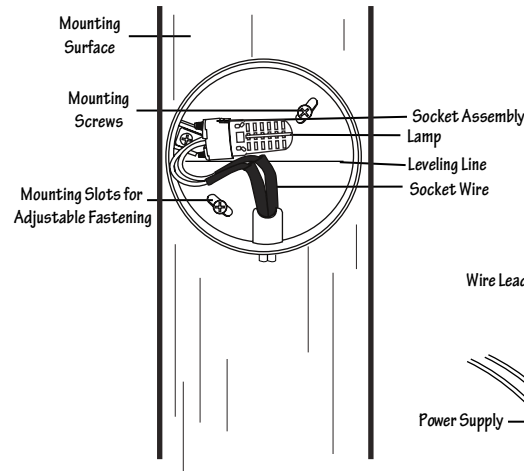


SL150-LED

(LBIPIN-LED-200lm lamp included)

Fixture Depth: 2 in. (5.0 cm)
Fixture Diameter: 3.875 in. (9.8 cm)



Side View

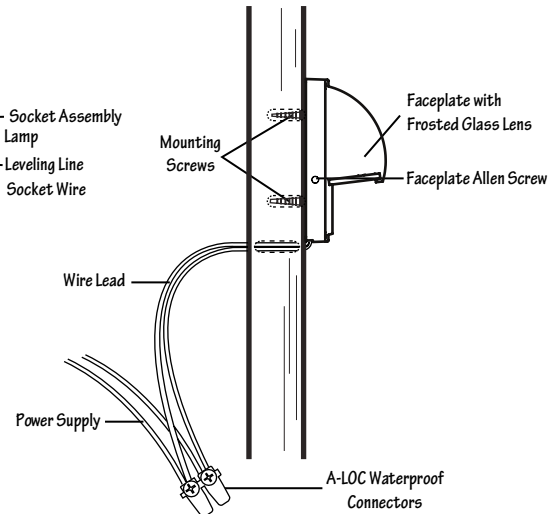

SL200 and SL300 Feature:

- Brass fixture, aged brass finish
- Solid brass face plate with securing screws
- Ceramic bi-pin socket
- 25 Foot wire lead, 16 awg (*UL listed*), brown, pre-connected to the fixture, pre-stripped for easy wire connection
- Optional metal set box included
- Lifetime warranty on fixture housing
- Available without a lamp

(Side View)



(Back View)



SL200-LED

(LBIPIN-LED-200lm lamp included)

SL300-LED

(Two LBIPIN-LED-200lm lamps included)

SL25-bt

SL25-LED

Integrated Surface Mount Step Light

6 in (15.2 cm) Wide
2.875 in (7.3 cm) Tall



SL35-bt

SL35-LED

Integrated Surface Mount Step Light

9.5 in (24.1 cm) Wide
2.875 in (7.3 cm) Tall



Mounts directly onto desired surface

(Back View)




(Side View)



SL25-LED/SL26-LED Features:

- Brass fixture, aged brass finish
- Solid brass louvered face plate with frosted lens (SL25-LED)
- Solid brass open face plate with frosted lens (SL26-LED)
- 25' Wire lead
- 10 Year warranty on LED components and fixture housing
- Integrated LED
 - Watts: 4.5w
 - Color: Warm White
 - Color Temperature: 2700K
 - Operating Voltage: 8Vac-15Vac
 - CRI: Ra>80
 - Halogen Equivalent: 20w
 - Rated Hours: 30,000 Hours
 - Ambient Operating Temperature: -40°C ~ +85°C

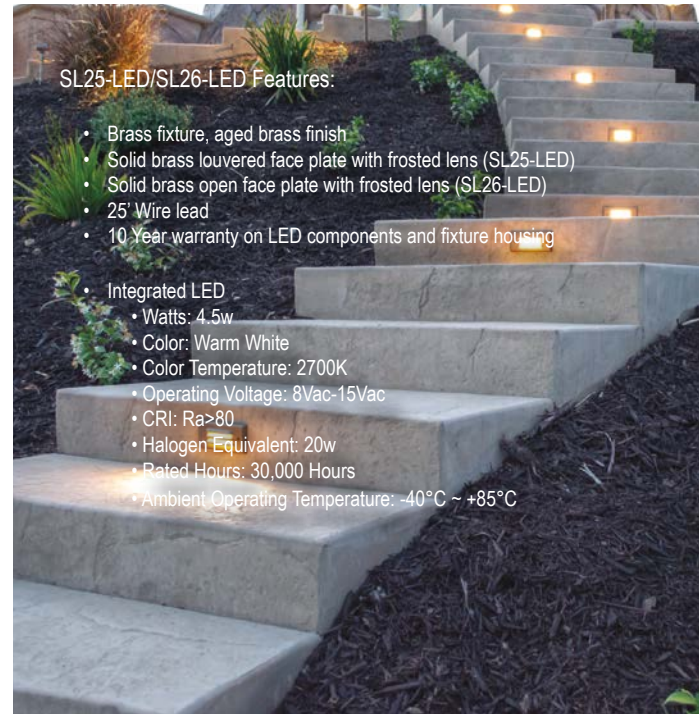

BOLLARD100-LED

(LBIPIN-LED-350lm lamp included)

Base Width: 5 in. (12.7 cm)

Total Height: 29.5 in. (74.9 cm)

Top Height: 7.5 in. (19.0 cm)

Top Width: 6 in. (15.2 cm)



Bollard Features:

- Solid brass three-tiered cover, aged brass finish
- Aluminum post, aged brass finish
- Clear and frosted polycarbonate lens with gaskets
- Ceramic bi-pin socket
- Aluminum mounting base with hardware
- 36 inch wire lead, 16 awg(UL Listed), brown, pre-connected to the fixture, pre-stripped for easy wire connection
- Plastic ground stake (8.5 in; 21.6 cm length) (optional)
- Lifetime warranty on fixture housing
- Available without a lamp





Can be Cut Down to Size

TAPE-LED-5FT

Integrated LED Step Light
Can be cut down to length
LED strip, 5 Feet

- Watts: 5w
- Light Output: 350 lm (Lumens)

Per 1 Foot:

- Watts: 1w
- Light Output: 70 lm (Lumens)

TAPE-LED-15FT

Integrated LED Step Light
Can be cut down to length
LED strip, 15 Feet

- Watts: 15w
- Light Output: 1050 lm (Lumens)

Per 1 Foot:

- Watts: 1w
- Light Output: 70 lm (Lumens)

TAPE-LED-15FT-LL

Lower Lumen Output

- Watts: 8w
- Light Output: 675 lm (Lumens)

Per 1 Foot:

- Watts: 0.5w
- Light Output: 45 lm (Lumens)

TAPE-LED-30FT

Integrated LED Step Light
Can be cut down to length
LED strip, 30 Feet

- Watts: 30w
- Light Output: 2,100 lm (Lumens)

Per 1 Foot:

- Watts: 1w
- Light Output: 70 lm (Lumens)

TAPE-SLV-3 (Accessory sold separately)

- Aluminum channel with polycarbonate frosted lens
- Silver finish



Length: 39.37in (1m)
Width: .59 in. (1.5 cm)
Height: .27 in. (.7 cm)

TAPE-LED Features:

- 5 Foot LED strip
- Mounting clips included
- 10' wire lead, 16 awg (UL Listed), brown, pre-connected to the fixture, pre-stripped for easy wire connection
- 10 Year warranty on LED components and fixture housing

LED strip

- Beam Angle: 120°
- Beam Spread: Flood
- Color: Warm White
- Color Temperature: 2700K
- Operating Voltage: 10.8Vac - 15Vac
- CRI: Ra>80
- Rated Hours: 30,000
- Ambient Operating Temperature: -40°C ~ +85°C



POST100-LED6W
(6 watt MR16 LED lamps included)

POST100-LED5W
(5 watt MR16 LED lamps included)

POST100-LED4W
(4 watt MR16 LED lamps included)
Body Width: 7.75 in. (19.7 cm)
Body Depth: 7.75 in. (19.7 cm)
Total Height: 12 in. (30.5 cm)
Hat Width: 11 in. (27.9 cm)

Post Light Features:

- Brass post light, aged brass finish
- Frosted lens panels
- Ceramic bi-pin socket
- Mounting hardware
- 25 foot wire lead, 16 awg(UL Listed), brown, pre-connected to the fixture, pre-stripped for easy wire connection
- Lifetime warranty on fixture housing
- Available without a lamp

Wall Sconces Feature:

- Brass fixture, aged brass finish
- Frosted top lens (WS100 and WS200)
- Clear glass top and bottom lenses (WS300)
- Dual Ceramic bi-pin socket
- 25 Foot wire lead, 16 awg (UL listed), brown, pre-connected to the fixture, pre-stripped for easy wire connection
- Lifetime warranty on fixture housing
- Available without a lamp



WS100-LED
(Two LBIPIN-LED-200lm lamps included)
Fixture Height: 6 in. (15.2 cm)
Fixture Width: 3 in. (7.6 cm)
Fixture Depth: 2 in. (5.0 cm)



WS200-LED
(Two LBIPIN-LED-200lm lamps included)
Fixture Height: 9 in. (22.8 cm)
Fixture Width: 6 in. (15.2 cm)
Fixture Depth: 3.5 in. (8.9 cm)



WS300-LED6W
(Two 6 watt MR16 LED lamps included)

WS300-LED5W
(Two 5 watt MR16 LED lamps included)

WS300-LED4W
(Two 4 watt MR16 LED lamps included)
Fixture Height: 8 in. (20.3 cm)
Fixture Width: 2.25 in. (5.7 cm)
Fixture Depth: 3.5 in. (8.9 cm)



www.allianceoutdoorlighting.com