


Project:	
Type:	

Model: SL50 (Paver Step Light)

Fixture Depth: 3.5 in. (8.89 cm)
Fixture Width: 5 in. (12.7 cm)
Lamp Housing Height: 1.5 in. (3.81 cm)
Lamp Housing Depth: 1.25 in. (3.17 cm)

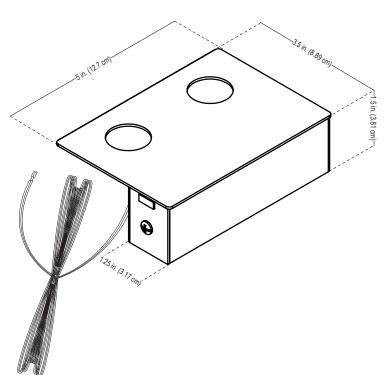

Specifications and Features:

Body: Brass fixture, aged brass finish

Lens: Frosted lens

Socket: Spring loaded ceramic bi-pin socket with dual contact

Wire: 25' Foot wire lead, 16 awg (UL listed), brown, Pre-connected to the fixture, Pre-stripped for

easy wire connection

Warranty: Lifetime warranty on fixture housing

Certifications: Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL and cETL Listed Mark.



Lamp Options

Model #	Base Type	Wattage	Lumen Output	
LBIPIN-LED-3W	BIPIN/G4 3w		150lm	
LXELOGEN-20 (Halogen)	BIPIN/G4	20w	150lm	

LED Ordering Guide: Model-LED


Example: SL50-LED

Notes:



Project:	
Type:	

Model: LBIPIN-LED-3W (3 watt BIPIN LED)



Specifications and Features:

Watts: 3

Base Type: G4/BiPin Light Output: 150 lumens Color: Warm White Color Temperatures: 2700K Operating Voltage: 8-24v

CRI: Ra>80

LED Chip Qty: 18 Pieces Halogen Equivalent: 20w Rated Hours: 50,000 hrs

Ambient Operating Temperature: <72°C

Transformer Compatibility: Must be powered by magnetic transformer

Warranty: Five year limited warranty on LED components

Lamp Color Options

I	Model #	Color	Color Temp.	Base Type	Wattage	Lumen Output
l	LBIPINLED-3W-3K	Bright White	3000K	BIPIN/G4	3w	150lm
l	LBIPIN-LED-3W-AMBER*	Amber	Amber	BIPIN/G4	3w	150lm

^{*}Turtle Safe

Notes: