

**MODEL: XF600 | 600 WATT MULTIPLE TAP TRANSFORMER**

The heart of a low-voltage outdoor lighting system is the transformer. Our rugged professional-grade, multi-tap transformers set the standard for ease of installation and adaptability. Like all of our transformers, the XF600 uses A/C current, has a magnetic core, and has a built-in circuit breaker. This transformer is ideal for large scale lighting projects using less than 600 watts. Use with timer accessories like the iTimerPRO to control on/off times when paired with the IT PRO app (see "Transformer Accessories" table).

**CONSTRUCTION:** Stainless steel cabinet. Removable door, bottom panel, and 5 knockouts for wire connections.

**BREAKER RESET SWITCH:** Simple breaker reset switch for power overloads, short circuits, or ground faults.

**MOUNTING:** Double keyhole mounts on mounting bracket for flush wall mounting. Mounting hardware included.

**KEY FEATURES:** Amp loop to check the primary amperage on the transformer. Accepts plug-in timers. Has direct photocell connection


**WIRING:** 5' standard 120 volt grounded wall plug with a ground (NEMA 5-15 receptacle).

**WARRANTY:** Lifetime warranty on enclosure and transformer winding.

**CERTIFICATIONS:** Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL & cETL Listed Mark.

**DIMENSIONS:**

- Height \_\_\_\_\_ 16 inches
- Width \_\_\_\_\_ 7.25 inches
- Depth \_\_\_\_\_ 5.12 inches
- Ship Weight \_\_\_\_\_ 32 pounds

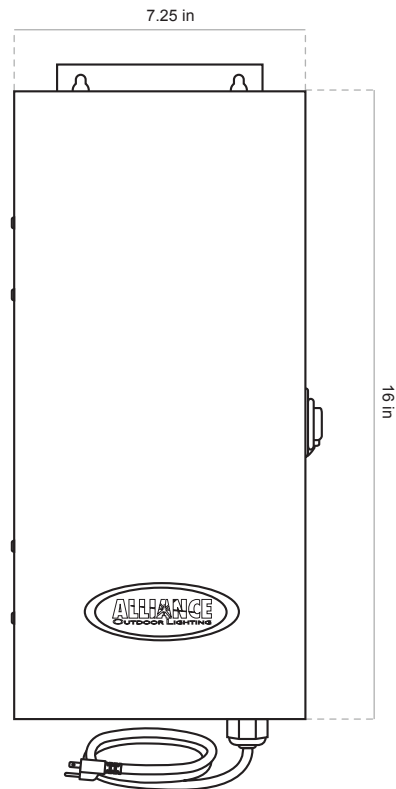

**SPECIFICATIONS:**

<b>CAPACITY:</b> 600 watts
<b>MAX AMPERAGE (LOAD):</b> 6 amps
<b>MAX INPUT (PRIMARY VOLTAGE):</b> 120 volts
<b>SECONDARY VOLTAGE:</b> 12, 13, 14, 15, 16, 17, 18 volts
<b>AVAILABLE VOLTAGE TAPS:</b> 6
<b>NUMBER OF COMMON TAPS:</b> 2

**TRANSFORMER ACCESSORIES:**

<b>ITIMERPRO</b> – Single output Bluetooth® based control using the IT PRO app. Set, change & view schedules on mobile device to activate lights remotely.
<b>ITIMERPRO-DUO</b> – Dual output Bluetooth® based control using the IT PRO app. Set, change & view schedules on mobile device to activate lights remotely.
<b>PC</b> – Photocell mount provides automatic dusk-to-dawn control. Plugs directly into the photocell connector inside for fast set-up.
<b>TIMER</b> – Mechanical timer, plugs into outlet inside the XF series transformer.

