

**MODEL: WL495-LED | INTEGRATED LED IN-GROUND LIGHT**

PAR36 sized high lumen output in ground light with integrated LED. Solid brass ring with convex tempered glass lens cover the ABS composite can and is durable against foot traffic. Dual wire leads are factory-installed. Ideal for up lighting tall trees, structures and buildings while being mounted in a grassy area or tree well.

**CONSTRUCTION:** ABS composite can is flat on open end and angled on ground end for angle adjustments.

**FINISH:** Classic aged brass.

**LID:** Solid brass ring with clear convex tempered glass lens.


**WIRING:** Pre-Installed dual 16AWG wire leads, primary 25' wire lead, and optional 18" wire lead for daisy chaining to other fixtures. Brown wire with aged brass finish.

**WARRANTY:** Ten year warranty.

**CERTIFICATIONS:** Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL & cETL Listed Mark.

**DIMENSIONS:**

- Lid Diameter \_\_\_\_\_ 6 inches
- Fixture Height \_\_\_\_\_ 8.75 inches
- Can Diameter \_\_\_\_\_ 5.5 inches
- Ship Weight \_\_\_\_\_ 5.83 pounds

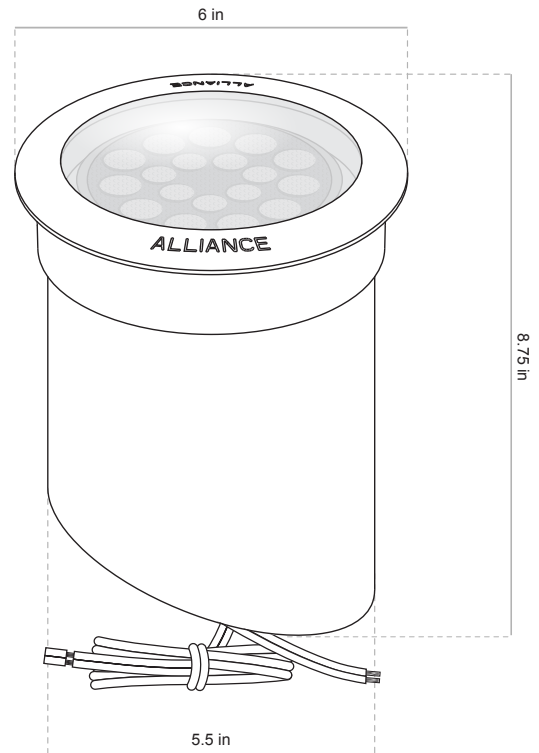

**FINISH OPTIONS:**

Aged Brass (Standard)

**INTEGRATED LED MODULE DETAILS:**

<b>LUMENS:</b> 1200
<b>WATTS:</b> 11W
<b>COLOR:</b> Warm White
<b>COLOR TEMPERATURE:</b> 3000K
<b>OPERATING VOLTAGE:</b> 10 VAC - 14 VAC
<b>BEAM SPREAD:</b> 40°
<b>CRI:</b> Ra>80
<b>RATED HOURS:</b> 30,000 Hours
<b>AMBIENT OPERATING TEMPERATURE:</b> ~40°C ~ +85°C
<b>DIMMING:</b> None



**HOW TO SPECIFY:** *Example: WL495-LED*

BASE PART #	FINISH	ORDERING #	ORDER ACCESSORIES
WL495-LED	Aged Brass (Standard)	WL495-LED	Hex Louver