

**MODEL: PL200 | ADJUSTABLE G4 BIPIN PATH LIGHT**

Featuring a fully-adjustable stem height, this traditional-styled brass fixture allows you to control the light spread precisely from large spread to focused pools. Dual wire leads are factory-installed. Heavy-duty stake with push and lock system secured with a color matched screw is provided. Perfect for providing secure lighting along pathways or setting a mood to accentuate landscape elements along the route.

**CONSTRUCTION:** Solid brass stem, hat, and stake.

**FINISH:** Classic aged brass.

**HAT:** 2-tier brass hat with collar and lens attached. Clear, shock-resistant glass lens.

**STEM:** Telescoping stem allows height adjustment for light spread control.

**SOCKET:** G4 Bi-Pin, spring-loaded, ceramic, with dual contacts.

**MOUNTING:** Solid brass ground stake (standard) with locking set screw.

**WIRING:** Pre-Installed dual 16AWG wire leads, primary 25' wire lead, and optional 18" wire lead for daisy chaining to other fixtures. Brown wire.

**WARRANTY:** Lifetime warranty on fixture housing.


**CERTIFICATIONS:** Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL & cETL Listed Mark.

**DIMENSIONS:**

Hat Diameter \_\_\_\_\_ 7 inches

Fixture Height \_\_\_\_\_ 17 - 27 inches

Ship Weight \_\_\_\_\_ 4.14 pounds

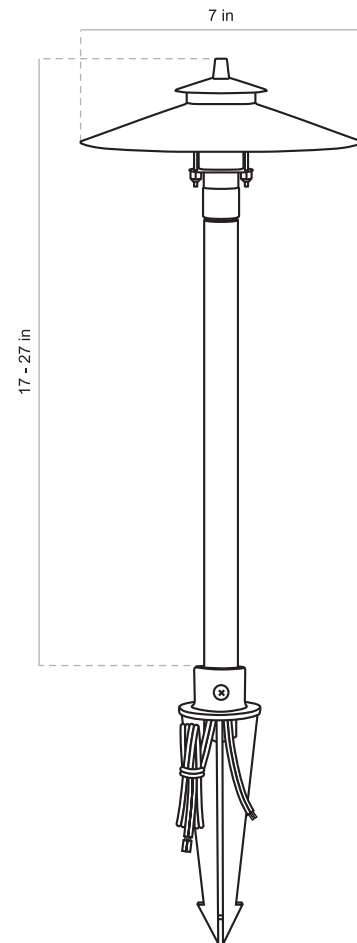

**FINISH OPTIONS:**

Aged Brass (Standard)

**G4 BIPIN LAMP OPTIONS:**

ADD SUFFIX	WATTAGE	DELIVERED LUMENS	COLOR TEMP.
-LBIPIN-LED-200lm*	2.5	200	2700K
-LBIPIN-LED-250lm	3	250	2700K
-LBIPIN-LED-350lm	3.5	350	2700K

\* = standard light source option



**HOW TO SPECIFY:** Example: PL200-LED

BASE PART #	FINISH	SUFFIX	ORDERING #	LAMP	ORDERING #
PL200	Aged Brass (Standard)		PL200	Add Lamp Suffix	PL200-LED