


**MODEL: PL600-LED | INTEGRATED LED MODERN PATH LIGHT**

Modernist path light with bold angular appearance for both residential and commercial appeal. Taller height provides wider spread of light and visually punctuates the path. Giant slotted ground stake mounting is provided standard. Dual wire leads are factory-installed. Perfect for providing secure lighting along pathways or setting a mood to accentuate landscape elements along the route.

<p><b>CONSTRUCTION:</b> Solid brass "L" shaped fixture. 1/2" NPT threading from stem to mount.</p>	<p><b>MOUNTING:</b> Pre-installed giant 14" plastic ground stake (STAKE-P3). Slotted for easy removal without having to cut the wire lead.</p>
<p><b>FINISH:</b> Classic aged brass or modern premium black overcoat.</p>	<p><b>WIRING:</b> Pre-Installed dual 16AWG wire leads, primary 25' wire lead, and optional 18" wire lead for daisy chaining to other fixtures. Brown wire with aged brass finish, black wire with black overcoat.</p>
<p><b>LENS:</b> Frosted polycarbonate lens installed.</p>	<p><b>WARRANTY:</b> 10 year warranty on LED components and fixture housing.</p>
<p><b>LIGHT SOURCE:</b> Integrated LED module pre-connected to the wire lead.</p>	<p><b>CERTIFICATIONS:</b> Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL &amp; cETL Listed Mark.</p>

**DIMENSIONS:**

Fixture Height	_____	23 inches
Fixture Width	_____	5.5 inches
Stem Thickness	_____	3.5 inch
Ship Weight	_____	6.4 pounds

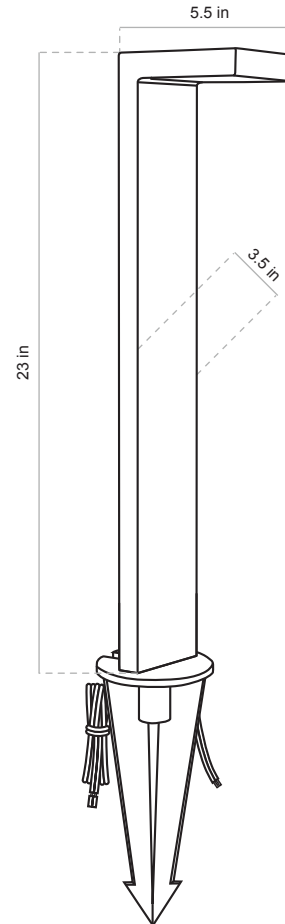

**FINISH OPTIONS:**

Aged Brass (Standard)
Premium Black Overcoat (Add -BLK)

**INTEGRATED LED MODULE DETAILS:**

<b>WATTS:</b> 3W
<b>COLOR:</b> Soft White
<b>COLOR TEMPERATURE:</b> 3000K
<b>OPERATING VOLTAGE:</b> 8 VAC - 15 VAC
<b>CRI:</b> Ra>80
<b>RATED HOURS:</b> 30,000 Hours
<b>AMBIENT OPERATING TEMPERATURE:</b> ~40°C ~ +85°C
<b>DIMMING:</b> None



**HOW TO SPECIFY:** Example: PL600-LED-BLK

BASE PART #	FINISH	SUFFIX	ORDERING #	ORDER ACCESSORIES
PL600-LED	Aged Brass (Standard)		PL600-LED	Mounting
	Premium Black Overcoat	-BLK	PL600-LED-BLK	