


MODEL: ALSTEM24 | G4 BIPIN AREA LIGHT STEM

Versatile area light stem. Solid brass stem with an adjustable collar and locking set screw. Large slotted ground stake mounting is provided standard. Dual wire leads are factory-installed. Designed for easy inventory, and mix-and-match design flexibility, our area lights are ordered in two components. 1.) Choose the desired hat. 2.) Then choose your stem height and light source.

<p>CONSTRUCTION: Die-Casted solid brass collar, and stem. CNC brass thumbscrew. 1/2" NPT threading from stem to mount.</p>	<p>COLLAR: Adjustable up and down the stem to control amount of light output.</p>
<p>FINISH: Classic aged brass.</p>	<p>WIRING: Pre-installed dual 16AWG wire leads, primary 25' wire lead, and optional 18" wire lead for daisy chaining to other fixtures. Brown wire with aged brass finish.</p>
<p>STEM: 24" brass stem.</p>	<p>WARRANTY: Lifetime warranty on fixture housing.</p>
<p>SOCKET: G4 Bi-Pin, spring-loaded, ceramic, with dual contacts.</p>	<p>CERTIFICATIONS: Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL & cETL Listed Mark.</p>
<p>MOUNTING: Pre-installed large 8.5" plastic ground stake (STAKE-P2). Slotted for easy removal without having to cut the wire lead.</p>	

DIMENSIONS:

- Stem Height _____ 24.5 - 25.5 inches
- Stem Diameter _____ 1.6 inches
- Ship Weight _____ 2.89 pounds

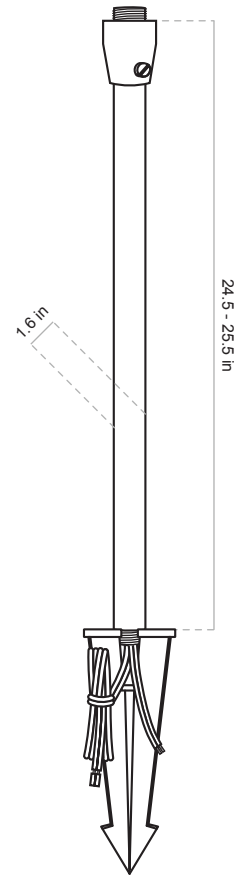

FINISH OPTIONS:

Aged Brass (Standard)

G4 BIPIN LAMP OPTIONS:

ADD SUFFIX	WATTAGE	DELIVERED LUMENS	COLOR TEMP.
-LBIPIN-LED-200lm*	2.5	200	2700K
-LBIPIN-LED-250lm	3	250	2700K
-LBIPIN-LED-350lm	3.5	350	2700K

* = standard light source option

1/2" NPT MOUNTING OPTIONS (SOLD SEPARATELY):

STAKE-P3 – Giant Slotted 14" Plastic Ground Stake
PERMAPOST – Heavy Duty Stake with Brass Locking Nut & Stabilizing Fins
RMB – Brass Round Mounting Base



HOW TO SPECIFY: Example: ALSTEM24-LED

BASE PART #	FINISH	SUFFIX	ORDERING #	LAMP	ORDERING #	ORDER HAT
ALSTEM24	Aged Brass (Standard)		ALSTEM24	Add Lamp Suffix	ALSTEM24-LED	AL100
						AL150
						AL250
						AL300
						AL400
						AL500
						AL550
						AL700
						AL750
						AL800
						AL850