

**MODEL: ALSTEM60 | G4 BIPIN AREA LIGHT STEM**

Decorative 60" brass stem. Dual wire lead is provided. Includes PERMAPOST for deep ground anchoring to ensure stabilization. Lamp is sold separately. Typically combined with the TIKI hat (sold separately) to create a festive backyard environment.

**CONSTRUCTION:** Solid brass stem. CNC brass thumbscrew. 1/2" NPT threading from stem to mount.

**FINISH:** Classic aged brass.

**STEM:** 60" brass stem.

**SOCKET:** G4 Bi-Pin, spring-loaded, ceramic, with dual contacts.

**MOUNTING:** Heavy duty stake with brass locking nut & stabilizing fins (PERMAPOST).

**WIRING:** Pre-Installed dual 16AWG wire leads, primary 25' wire lead, and optional 18" wire lead for daisy chaining to other fixtures. Brown wire with aged brass finish.

**WARRANTY:** Lifetime warranty on fixture housing.


**CERTIFICATIONS:** Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL & cETL Listed Mark.

**DIMENSIONS:**

Stem Height \_\_\_\_\_ 60 inches

Stem Diameter \_\_\_\_\_ 1.6 inches

Ship Weight \_\_\_\_\_ 7.57 pounds

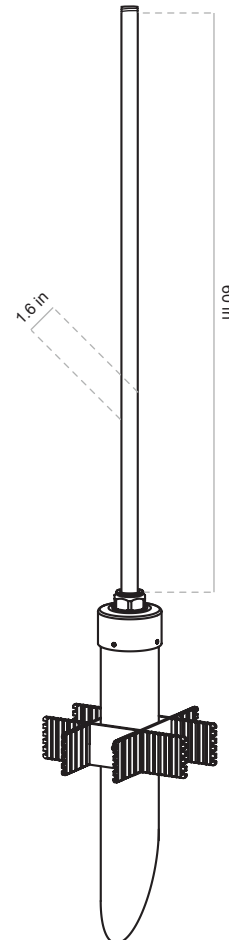

**FINISH OPTIONS:**

Aged Brass (Standard)

**G4 BIPIN LAMP OPTIONS:**

| ADD SUFFIX         | WATTAGE | DELIVERED LUMENS | COLOR TEMP. |
|--------------------|---------|------------------|-------------|
| -LBIPIN-LED-200lm* | 2.5     | 200              | 2700K       |
| -LBIPIN-LED-250lm  | 3       | 250              | 2700K       |
| -LBIPIN-LED-350lm  | 3.5     | 350              | 2700K       |

\* = standard light source option



**HOW TO SPECIFY:** Example: ALSTEM60-LED

| BASE PART # | FINISH                | SUFFIX | ORDERING # | LAMP            | ORDERING #   | ORDER HAT |
|-------------|-----------------------|--------|------------|-----------------|--------------|-----------|
| ALSTEM60    | Aged Brass (Standard) |        | ALSTEM60   | Add Lamp Suffix | ALSTEM60-LED | TIKI      |