


**MODEL: BL900 | MR16 ACCENT / UPLIGHT**

Medium sized solid brass bullet light with a long telescoping adjustable shroud for aiming and glare control. If desired, shroud can be removed. Uses MR16 lamp. Solid brass housing base is completed with a convex glass lens. Adjustable knuckle is locked with thumbscrews. Ground stake mounting is provided standard. Dual wire leads are factory-installed. Lamp purchased separately. Ideal for up lighting medium to large trees, columns, and walls while being mount in planter areas. Not intended to be used as a downlight or installed into areas with lawn-mower traffic or foot traffic.

<p><b>CONSTRUCTION:</b> Die-Casted solid brass housing, shroud and knuckle. CNC brass thumbscrews. 1/2" NPT threading from knuckle to mount.</p> <p><b>FINISH:</b> Classic aged brass.</p> <p><b>SHROUD &amp; LENS:</b> Long telescoping adjustable shroud for aiming and glare control. Rotates 360° on the housing, pressure locked with dual o-ring seal. Convex tempered, shock-resistant glass lens.</p> <p><b>KNUCKLE:</b> Solid brass with brass thumbscrew for angle adjustments.</p> <p><b>MOUNTING:</b> Pre-installed standard 8" plastic ground stake (STAKE-P1). Slotted for easy removal without having to cut the wire lead.</p>	<p><b>WIRING:</b> Pre-Installed dual 16AWG wire leads, primary 25' wire lead, and optional 18" wire lead for daisy chaining to other fixtures. Brown wire.</p> <p><b>SOCKET:</b> MR16, spring-loaded, ceramic, dual contacts, &amp; lamp clips.</p> <p><b>WARRANTY:</b> Lifetime warranty on fixture housing.</p> <p><b>CERTIFICATIONS:</b> Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL &amp; cETL Listed Mark.</p>
--	--

**DIMENSIONS:**

- Height from top of stake to top of knuckle \_\_\_\_\_ 1.75 inches
- Shroud Width \_\_\_\_\_ 2.25 inches
- Shroud Height \_\_\_\_\_ 5.5 inches
- Ship Weight \_\_\_\_\_ 2.74 pounds

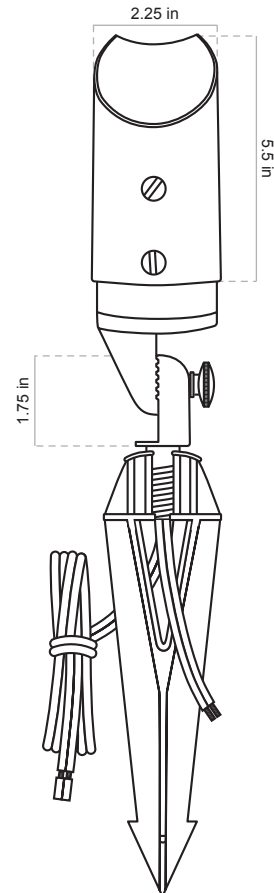

**FINISH OPTIONS:**

Aged Brass (Standard)
-----------------------

**MR16 LAMP OPTIONS:**

ADD SUFFIX	WATTAGE	DELIVERED LUMENS	COLOR TEMP.
-LMR16-LED-4W-NS	4	250	2900K
-LMR16-LED-4W-F	4	250	2900K
-LMR16-LED-4W-WF	4	250	2900K
-LMR16-LED-4W-250lm	4	250	2900K
-LMR16-LED-4W-2700K	4	250	2700K
-LMR16-LED-5W-NS	5	310	2900K
-LMR16-LED-5W-F*	5	310	2900K
-LMR16-LED-5W-WF	5	310	2900K
-LMR16-LED-5W-310lm	5	310	2900K
-LMR16-LED-5W-2700K	5	310	2700K
-LMR16-LED-6W-F	6	410	2900K
-LMR16-LED-6W-2700K	6	410	2700K

\*= standard light source option

**1/2" NPT MOUNTING OPTIONS (SOLD SEPARATELY):**

<b>STAKE-P2</b> – Large Slotted 8.5" Plastic Ground Stake
<b>PERMAPOST</b> – Heavy Duty Stake with Brass Locking Nut & Stabilizing Fins
<b>RMB</b> – Brass Round Mounting Base
<b>RISER6</b> – 6" Fixed Riser, Aged Brass
<b>RISER12</b> – 12" Fixed Riser, Aged Brass
<b>RISER18</b> – 18" Fixed Riser, Aged Brass

**MR16 LAMP ACCESSORIES:**

<b>HEXLouver-MR16</b> – Black aluminum honeycomb used to reduce glare.
<b>MR16-FROSTED</b> – Flat frosted glass lens used to diffuse light output.

**HOW TO SPECIFY:** Example: *BL900-LED4W*

BASE PART #	FINISH	LAMP	ORDERING NUMBER	ORDER ACCESSORIES
BL900	Aged Brass (Standard)	Add Lamp Suffix	<i>BL900-LED4W</i>	Mounting Risers Lenses

