

MODEL: ML15-LED | INTEGRATED LED MINI LIGHT

A compact integrated LED fixture that allows light to be added to unusual and creative places. Optional stainless steel stake, and glare shield included. Illuminate stone lanterns, rock niches, under steps, etc. Anywhere a small pool of light is needed. Not to be submerged in water.

CONSTRUCTION: Solid brass body and glare shield. Mounting ears for surface mount or glare shield attachment.

FINISH: Classic aged brass or modern premium black overcoat.

LENS: Frosted polycarbonate lens installed.

MOUNTING: Optional stainless steel stake.


WIRING: 10' wire lead, 16 AWG (UL Listed) pre-connected to the fixture, pre-stripped for easy wire connection. Brown wire with aged brass finish, black wire with black overcoat.

WARRANTY: 10 year warranty on LED components and fixture housing.

CERTIFICATIONS: Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL & cETL Listed Mark.

DIMENSIONS:

Bottom of Fixture to Top of Shield	1.25 inches
Fixture Width	0.75 inches
Fixture Depth	0.625 inches
Shield to Back of Fixture Depth	1 inch
Base Width	1.56 inches
Stake Length	5.9 inches
Ship Weight	0.58 pounds

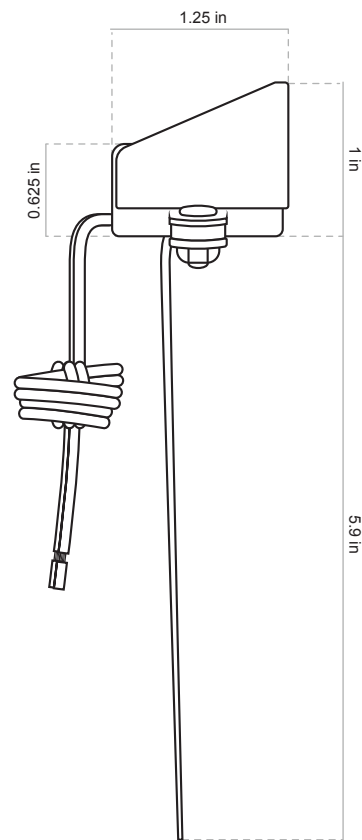

Illustrated with optional glare shield and stainless steel stake attached.

FINISH OPTIONS:

Aged Brass (Standard)
Premium Black Overcoat (Add -BLK)

INTEGRATED LED MODULE DETAILS:

WATTS: 1.5W
COLOR: Soft White
COLOR TEMPERATURE: 2900K
OPERATING VOLTAGE: 10 VAC - 15 VAC
CRI: Ra>80
RATED HOURS: 30,000 Hours
AMBIENT OPERATING TEMPERATURE: ~40°C ~ +85°C
DIMMING: None



HOW TO SPECIFY: Example: ML15-LED-BLK

BASE PART #	FINISH	SUFFIX	ORDERING #
ML15-LED	Aged Brass (Standard)		ML15-LED
	Premium Black Overcoat	-BLK	ML15-LED-BLK