


**MODEL: ML25-LED | INTEGRATED LED MINI LIGHT**

Disc-shaped miniature lighting fixture works as an up-light (conceal within the canopy of compact plants like a Japanese maple or bonsai shrub for dramatic impact), downlight (in soffits, or above an art piece) or can be installed vertically (for step or beacon lighting). Or install horizontally to mark the edge of hardscaped spaces. The possibilities are endless.

<b>CONSTRUCTION:</b> Solid brass body.	<b>WIRING:</b> 10' wire lead, 16 AWG (UL Listed) pre-connected to the fixture, pre-stripped for easy wire connection. Brown wire with aged brass finish, black wire with black overcoat.
<b>FINISH:</b> Classic aged brass or modern premium black overcoat.	<b>WARRANTY:</b> 10 year warranty on LED components and fixture housing.
<b>LENS:</b> Frosted glass lens installed.	<b>CERTIFICATIONS:</b> Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL & cETL Listed Mark.
<b>INSTALLATION SLEEVE:</b> 3/4" PVC, 5" length	

**DIMENSIONS:**

Top Diameter	_____	2.25 inches
Fixture Height	_____	2 inches
Base Width	_____	0.875 inches
Ship Weight	_____	0.88 pounds

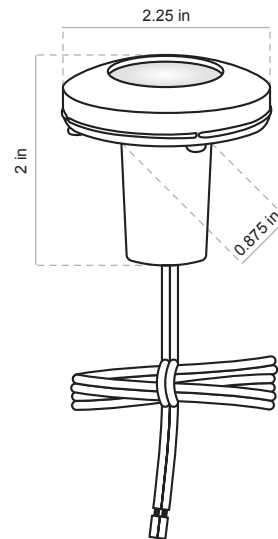

**FINISH OPTIONS:**

Aged Brass (Standard)
Premium Black Overcoat (Add -BLK)

**INTEGRATED LED MODULE DETAILS:**

<b>WATTS:</b> 1.3W
<b>COLOR:</b> Soft White
<b>COLOR TEMPERATURE:</b> 2900K
<b>OPERATING VOLTAGE:</b> 10 VAC - 15 VAC
<b>CRI:</b> Ra>80
<b>RATED HOURS:</b> 30,000 Hours
<b>AMBIENT OPERATING TEMPERATURE:</b> ~40°C ~ +85°C
<b>DIMMING:</b> None



**HOW TO SPECIFY:** Example: ML25-LED-BLK

BASE PART #	FINISH	SUFFIX	ORDERING #
ML25-LED	Aged Brass (Standard)		ML25-LED
	Premium Black Overcoat	-BLK	ML25-LED-BLK