


MODEL: GL170 | MR16 IN-GROUND LIGHT

Small professional-grade in-ground light. MR16 lamp purchased separately. Brass top with opposing sides output provides balanced illumination on both sides of the fixture, ideal for contrasting areas such as walkways on one side and grassy areas on the other. PVC sleeve included for stabilizing into the ground. Core-drill for placement into hardscapes or dig a small hole into softscapes. Not intended to be submerged or placed in wet areas. Ok for foot traffic, but not suitable for areas where they may be driven over by vehicles.

| | |
|--|---|
| <p>CONSTRUCTION: Cast brass housing base. Solid brass top with stainless steel screws.</p> | <p>MOUNTING: Optional 2.75" PVC installation sleeve included.</p> |
| <p>FINISH: Classic aged brass or modern premium black overcoat.</p> | <p>WIRING: Pre-Installed dual 16AWG wire leads, primary 25' wire lead, and optional 18" wire lead for daisy chaining to other fixtures. Brown wire with aged brass finish, black wire with black overcoat.</p> |
| <p>LID: Opposing sides output brass lid with clear flat glass lens. Attached with 4 color-matched stainless steel screws.</p> | <p>WARRANTY: Lifetime warranty on fixture housing.</p> |
| <p>SOCKET: MR16, spring-loaded, ceramic, dual contacts, & lamp clips.</p> | <p>CERTIFICATIONS: Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL & cETL Listed Mark.</p> |

DIMENSIONS:

| | | |
|---------------|-------|-------------|
| Lid Diameter | _____ | 3.5 inches |
| Lid Height | _____ | 0.5 inches |
| Base Diameter | _____ | 2.38 inches |
| Base Height | _____ | 3.5 inches |
| Ship Weight | _____ | 2.88 pounds |

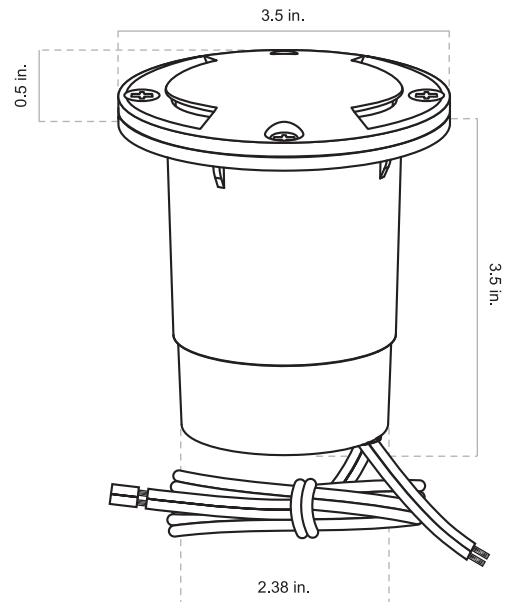

FINISH OPTIONS:

| |
|---|
| Aged Brass (Standard) |
| Premium Black Overcoat (Add <i>-BLK</i>) |

MR16 LAMP OPTIONS:

| ADD SUFFIX | WATTAGE | DELIVERED LUMENS | COLOR TEMP. |
|---------------------|---------|------------------|-------------|
| -LMR16-LED-4W-NS | 4 | 250 | 2900K |
| -LMR16-LED-4W-F | 4 | 250 | 2900K |
| -LMR16-LED-4W-WF | 4 | 250 | 2900K |
| -LMR16-LED-4W-250lm | 4 | 250 | 2900K |
| -LMR16-LED-4W-2700K | 4 | 250 | 2700K |
| -LMR16-LED-5W-NS | 5 | 310 | 2900K |
| -LMR16-LED-5W-F* | 5 | 310 | 2900K |
| -LMR16-LED-5W-WF | 5 | 310 | 2900K |
| -LMR16-LED-5W-310lm | 5 | 310 | 2900K |
| -LMR16-LED-5W-2700K | 5 | 310 | 2700K |
| -LMR16-LED-6W-F | 6 | 410 | 2900K |
| -LMR16-LED-6W-2700K | 6 | 410 | 2700K |

* = standard light source option

HOW TO SPECIFY: Example: *GL170-BLK-LED*

| FINISH | SUFFIX | ORDERING NUMBER | LAMP | ORDERING NUMBER |
|------------------------|-------------|------------------|-----------------|----------------------|
| Aged Brass (Standard) | | <i>GL170</i> | Add Lamp Suffix | <i>GL170-LED</i> |
| Premium Black Overcoat | <i>-BLK</i> | <i>GL170-BLK</i> | | <i>GL170-BLK-LED</i> |

