


MODEL: GL190 | MR16 IN-GROUND LIGHT

Small professional-grade in-ground light. MR16 lamp purchased separately. Brass top with 4 openings provides 360° of directional light output ensuring even illumination of the surrounding area, ideal for providing safe navigation near pathways. PVC sleeve included for stabilizing into the ground. Core-drill for placement into hardscapes or dig a small hole into softscapes. Not intended to be submerged or placed in wet areas. Ok for foot traffic, but not suitable for areas where they may be driven over by vehicles.

<p>CONSTRUCTION: Cast brass housing base. Solid brass top with stainless steel screws.</p> <p>FINISH: Classic aged brass or modern premium black overcoat.</p> <p>LID: 360° output brass lid with clear flat glass lens. Attached with 4 color-matched stainless steel screws.</p> <p>SOCKET: MR16, spring-loaded, ceramic, dual contacts, & lamp clips.</p>	<p>MOUNTING: Optional 2.75" PVC installation sleeve included.</p> <p>WIRING: Pre-Installed dual 16AWG wire leads, primary 25' wire lead, and optional 18" wire lead for daisy chaining to other fixtures. Brown wire with aged brass finish, black wire with black overcoat.</p> <p>WARRANTY: Lifetime warranty on fixture housing.</p> <p>CERTIFICATIONS: Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL & cETL Listed Mark.</p>
--	---

DIMENSIONS:

Lid Diameter	_____	3.5 inches
Lid Height	_____	0.5 inches
Base Diameter	_____	2.38 inches
Base Height	_____	3.5 inches
Ship Weight	_____	2.86 pounds

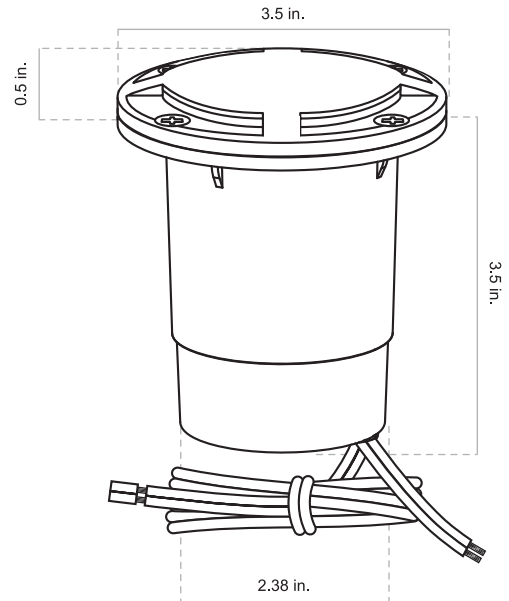

FINISH OPTIONS:

Aged Brass (Standard)
Premium Black Overcoat (Add <i>-BLK</i>)

MR16 LAMP OPTIONS:

ADD SUFFIX	WATTAGE	DELIVERED LUMENS	COLOR TEMP.
-LMR16-LED-4W-NS	4	250	2900K
-LMR16-LED-4W-F	4	250	2900K
-LMR16-LED-4W-WF	4	250	2900K
-LMR16-LED-4W-250lm	4	250	2900K
-LMR16-LED-4W-2700K	4	250	2700K
-LMR16-LED-5W-NS	5	310	2900K
-LMR16-LED-5W-F*	5	310	2900K
-LMR16-LED-5W-WF	5	310	2900K
-LMR16-LED-5W-310lm	5	310	2900K
-LMR16-LED-5W-2700K	5	310	2700K
-LMR16-LED-6W-F	6	410	2900K
-LMR16-LED-6W-2700K	6	410	2700K

* = standard light source option

HOW TO SPECIFY: Example: *GL190-BLK-LED*

FINISH	SUFFIX	ORDERING NUMBER	LAMP	ORDERING NUMBER
Aged Brass (Standard)		<i>GL190</i>	Add Lamp Suffix	<i>GL190-LED</i>
Premium Black Overcoat	<i>-BLK</i>	<i>GL190-BLK</i>		<i>GL190-BLK-LED</i>

