

MODEL: WL300 | MR16 WELL LIGHT

Precisely aimable and adjustable MR16 well light for ultimate in light control. Provides the best of both worlds: flush mounting for lawn or hardscape areas and beam control. Dual wire leads are pre-installed. Ideal for up lighting walls, columns, and walk ways. Installing in areas with high foot traffic is acceptable.

CONSTRUCTION: ABS composite can is flat on open end and angled on ground end for angle adjustments.

FINISH: Classic aged brass.

LID: Brass grated lid surrounds brass MR16 housing with clear glass lens.

AIMING: Lamp height adjustable on a brass track (grooves to lock settings) and a swivel mount for directional aiming of beam.

SOCKET: MR16, spring-loaded, ceramic, dual contacts, & lamp clips.

WIRING: Pre-Installed dual 16AWG wire leads, primary 25' wire lead, and optional 18' wire lead for daisy chaining to other fixtures. Brown wire.

WARRANTY: Lifetime warranty on fixture housing.

CERTIFICATIONS: Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL & cETL Listed Mark.

DIMENSIONS:

Lid Diameter _____ 6.5 inches



Buried Fixture Height _____ 7.5 inches

Can Diameter _____ 5.75 inches

Ship Weight _____ 4.21 pounds

IMPORTANT NOTE:

Illustration depicts adjustable lamp height feature on a brass track (grooves to lock settings) and a swivel mount for directional aiming of beam.

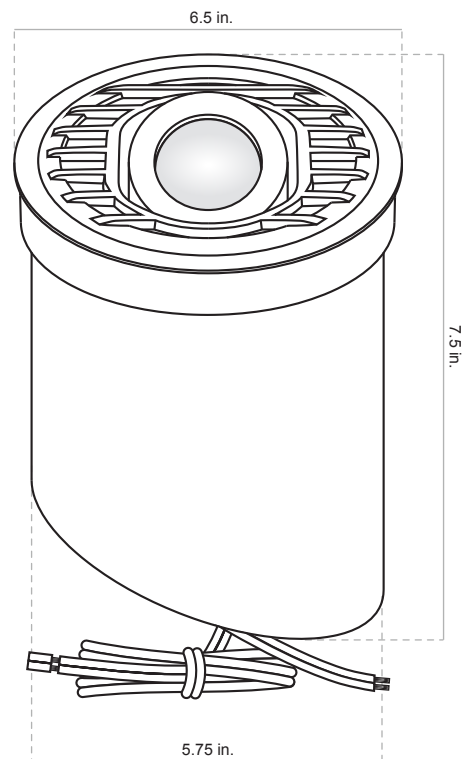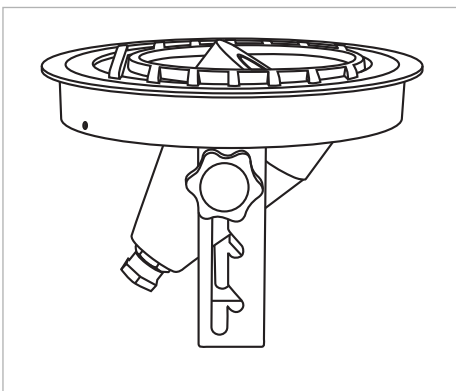

FINISH OPTIONS:

Aged Brass (Standard)

MR16 LAMP OPTIONS:

ADD SUFFIX	WATTAGE	DELIVERED LUMENS	COLOR TEMP.
-LMR16-LED-4W-NS	4	250	2900K
-LMR16-LED-4W-F	4	250	2900K
-LMR16-LED-4W-WF	4	250	2900K
-LMR16-LED-4W-250lm	4	250	2900K
-LMR16-LED-4W-2700K	4	250	2700K
-LMR16-LED-5W-NS	5	310	2900K
-LMR16-LED-5W-F*	5	310	2900K
-LMR16-LED-5W-WF	5	310	2900K
-LMR16-LED-5W-310lm	5	310	2900K
-LMR16-LED-5W-2700K	5	310	2700K
-LMR16-LED-6W-F	6	410	2900K
-LMR16-LED-6W-2700K	6	410	2700K

* = standard light source option

MR16 LAMP ACCESSORIES (SOLD SEPARATELY):

HEXLOUVER-MR16 – Black aluminum honeycomb used to reduce glare.
MR16-FROSTED – Flat frosted glass lens used to diffuse light output.

HOW TO SPECIFY: Example: WL300-LED

FINISH	SUFFIX	ORDERING NUMBER	LAMP	ORDERING NUMBER	ORDER ACCESSORIES
Aged Brass (Standard)		WL300	Add Lamp Suffix	WL300-LED	Hex Louver Lenses

