

MODEL: WL495-LED | INTEGRATED LED WELL LIGHT

PAR36 sized high lumen output in ground light with integrated LED. Solid brass ring with convex tempered glass lens cover the ABS composite can and is durable against foot traffic. Dual wire leads are factory-installed. Ideal for up lighting tall trees, structures and buildings while being mounted in a grassy area or tree well.

CONSTRUCTION: ABS composite can is flat on open end and angled on ground end for angle adjustments.

FINISH: Classic aged brass or modern premium black overcoat.

LID: Solid brass ring with clear convex tempered glass lens.


WIRING: Pre-Installed dual 16AWG wire leads, primary 25' wire lead, and optional 18" wire lead for daisy chaining to other fixtures. Brown wire with aged brass finish, black wire with black overcoat finish.

WARRANTY: 10 year warranty on LED components and fixture housing.

CERTIFICATIONS: Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL & cETL Listed Mark.

DIMENSIONS:

- Lid Diameter _____ 6 inches
- Fixture Height _____ 8.75 inches
- Can Diameter _____ 5.5 inches
- Ship Weight _____ 5.83 pounds

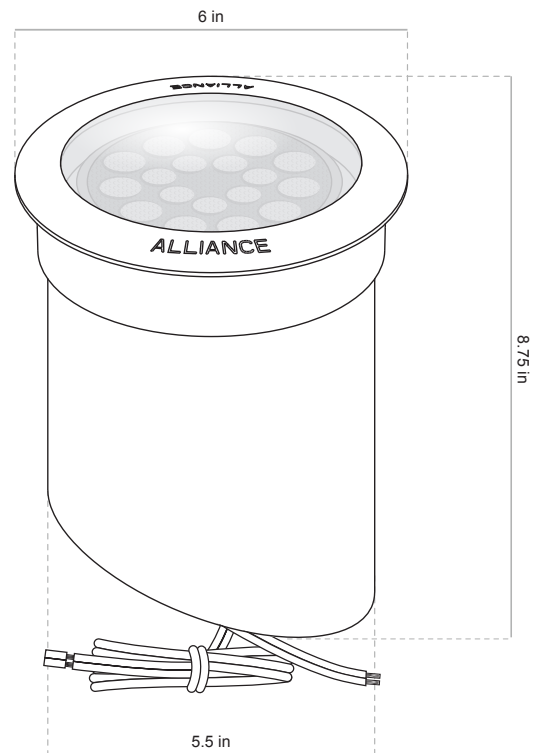

FINISH OPTIONS:

Aged Brass (Standard)
Premium Black Overcoat (Add <i>-BLK</i>)

INTEGRATED LED MODULE DETAILS:

LUMENS: 1200
WATTS: 11W
COLOR: Warm White
COLOR TEMPERATURE: 3000K
OPERATING VOLTAGE: 10 VAC - 14 VAC
BEAM SPREAD: 40°
CRI: Ra>80
RATED HOURS: 30,000 Hours
AMBIENT OPERATING TEMPERATURE: ~40°C ~ +85°C
DIMMING: None



PAR36 LAMP ACCESSORIES (SOLD SEPARATELY):

HEXLOUVER-PAR36 – Black aluminum honeycomb used to reduce glare.

HOW TO SPECIFY: Example: *WL495-LED-BLK*

BASE PART #	FINISH	SUFFIX	ORDERING #	ORDER ACCESSORIES
WL495-LED	Aged Brass (Standard)		WL495-LED	Hex Louver
	Premium Black Overcoat	-BLK	WL495-LED-BLK	