


MODEL: GL380 | MR16 IN-GROUND LIGHT

Medium non-corrosive in-ground light. MR16 lamp purchased separately. Brass top with 180° output is ideal for highlighting specific landscape features without spilling light into unwanted areas. Socket is mounted on a swivel for aiming light beam. Core-drill for placement into hardscapes or dig a small hole into softscapes. Not intended to be submerged or placed in wet areas. OK for foot traffic, but not suitable for areas where they may be driven over by vehicles.

<p>CONSTRUCTION: Non-corrosive poly housing base. Solid brass top with stainless steel screws.</p> <p>FINISH: Classic aged brass or modern premium black overcoat.</p> <p>LID: 180° output brass lid with clear glass lens. Attached with 5 color-matched stainless steel screws.</p> <p>SOCKET: MR16, spring-loaded, ceramic, dual contacts, & lamp clips.</p>	<p>WIRING: Pre-Installed 60" 16AWG SVT wire lead, black.</p> <p>WARRANTY: Lifetime warranty on fixture housing.</p> <p>CERTIFICATIONS: Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL & cETL Listed Mark.</p>
---	--

DIMENSIONS:

Lid Diameter	4.87 inches
Lid Height	1 inch
Base Diameter	3.5 inches
Base Height	4.75 inches
Ship Weight	2.34 pounds

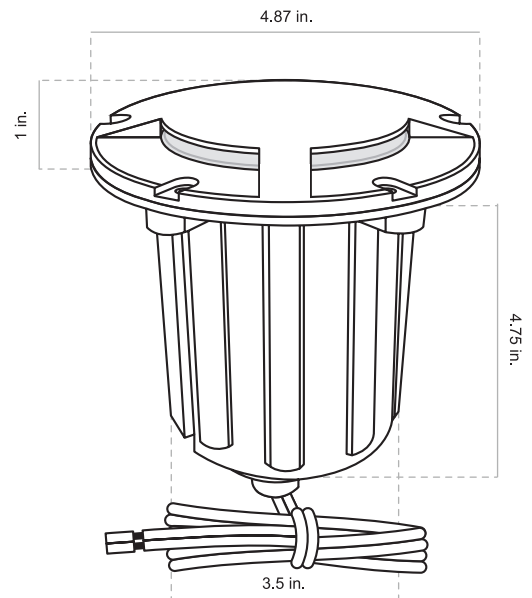

FINISH OPTIONS:

Aged Brass (Standard)
Premium Black Overcoat (Add <i>-BLK</i>)

MR16 LAMP OPTIONS:

ADD SUFFIX	WATTAGE	DELIVERED LUMENS	COLOR TEMP.
-LMR16-LED-4W-NS	4	250	2900K
-LMR16-LED-4W-F	4	250	2900K
-LMR16-LED-4W-WF	4	250	2900K
-LMR16-LED-4W-250lm	4	250	2900K
-LMR16-LED-4W-2700K	4	250	2700K
-LMR16-LED-5W-NS	5	310	2900K
-LMR16-LED-5W-F*	5	310	2900K
-LMR16-LED-5W-WF	5	310	2900K
-LMR16-LED-5W-310lm	5	310	2900K
-LMR16-LED-5W-2700K	5	310	2700K
-LMR16-LED-6W-F	6	410	2900K
-LMR16-LED-6W-2700K	6	410	2700K

* = standard light source option

HOW TO SPECIFY: Example: *GL380-BLK-LED*

FINISH	SUFFIX	ORDERING NUMBER	LAMP	ORDERING NUMBER
Aged Brass (Standard)		GL380	Add Lamp Suffix	GL380-LED
Premium Black Overcoat	-BLK	GL380-BLK		GL380-BLK-LED

