

MODEL: POST100 | MR16 POST LIGHT

Large Craftsman / prairie-style post or column fixture that uses an MR16 lamp. 4 frosted panels create a guiding nighttime glow. Surface mount to the top of posts or columns using the mounting base.

CONSTRUCTION: Solid cast brass body, hat, and base plate.

WIRING: Pre-Installed 25' wire lead. Brown wire.

FINISH: Classic aged brass.

WARRANTY: Lifetime warranty on fixture housing.

LENS: Frosted polycarbonate lens panels.

CERTIFICATIONS: Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL & cETL Listed Mark.

SOCKET: MR16, spring-loaded, ceramic, dual contacts, & lamp clips.

MOUNTING: Concealed mounting base plate. Fixture face attaches to mounting base with color matched Phillips screws. Splices are made remotely from fixture, not in base plate.


DIMENSIONS:

Body Width _____ 7.75 inches

Body Height _____ 12 inches

Hat Width _____ 11 inches

Ship Weight _____ 12.96 pounds

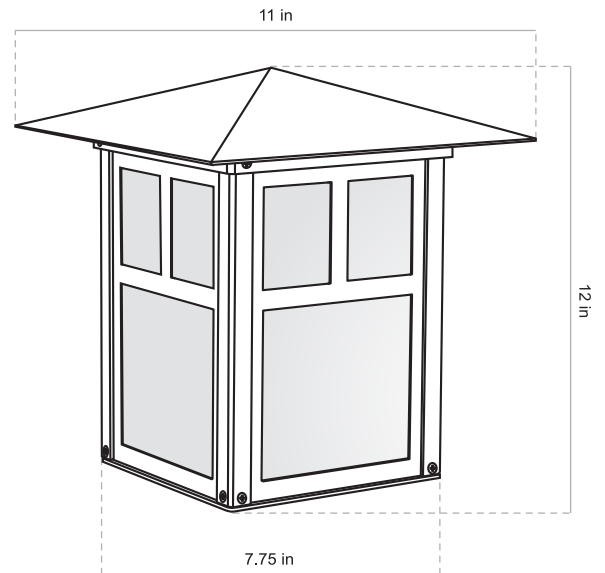

FINISH OPTIONS:

Aged Brass (Standard)

MR16 LAMP OPTIONS:

ADD SUFFIX	WATTAGE	DELIVERED LUMENS	COLOR TEMP.
-LMR16-LED-4W-NS	4	250	2900K
-LMR16-LED-4W-F*	4	250	2900K
-LMR16-LED-4W-WF	4	250	2900K
-LMR16-LED-4W-250lm	4	250	2900K
-LMR16-LED-4W-2700K	4	250	2700K
-LMR16-LED-5W-NS	5	310	2900K
-LMR16-LED-5W-F	5	310	2900K
-LMR16-LED-5W-WF	5	310	2900K
-LMR16-LED-5W-310lm	5	310	2900K
-LMR16-LED-5W-2700K	5	310	2700K
-LMR16-LED-6W-F	6	410	2900K
-LMR16-LED-6W-2700K	6	410	2700K

* = standard light source option



HOW TO SPECIFY: Example: POST100-LED

BASE PART #	FINISH	SUFFIX	ORDERING #	LAMP	ORDERING #
POST100	Aged Brass (Standard)		POST100	Add Lamp Suffix	POST100-LED