


**MODEL: SL60-BT | INTEGRATED BT LEDGE LIGHT**

Small surface mounted ledge light with integrated Bluetooth® RGBW LED module. This discreet ledge light features a wide output to illuminate walls from beneath the wall cap. Designed for installation in existing walls using the mounting ears. Lighting module integrates with Alliance's bt System and is controlled with bt System mobile app. Wood anchors are provided; for other surfaces, please select appropriate anchors. It is recommended to leave some slack in the wire to facilitate future maintenance.

|   |   |
|---|---|
| <b>CONSTRUCTION:</b> Solid cast brass fixture, integrated mounting plate.                             | <b>WIRING:</b> Pre-Installed 25' wire lead. Brown wire with aged brass finish, black wire with black overcoat.                            |
| <b>FINISH:</b> Classic aged brass or modern premium black overcoat.                                   | <b>WARRANTY:</b> 10 year warranty on LED components and fixture housing.  |
| <b>LENS:</b> Frosted polycarbonate lens installed.  | <b>CERTIFICATIONS:</b> Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL & cETL Listed Mark. |
| <b>LIGHT SOURCE:</b> Integrated Bluetooth® LED module pre-connected to the lead.                      |   |
| <b>MOUNTING:</b> Integrated mounting plate ears. Designed for surface mounting to rails, decks, etc.. |   |

**DIMENSIONS:**

|                      |       |             |
|----------------------|-------|-------------|
| Fixture Width        | _____ | 5 inches    |
| Fixture Depth        | _____ | 1.25 inches |
| Fixture Height       | _____ | 0.75 inches |
| Mounting Plate Width | _____ | 6.25 inches |
| Ship Weight          | _____ | 1.65 pounds |

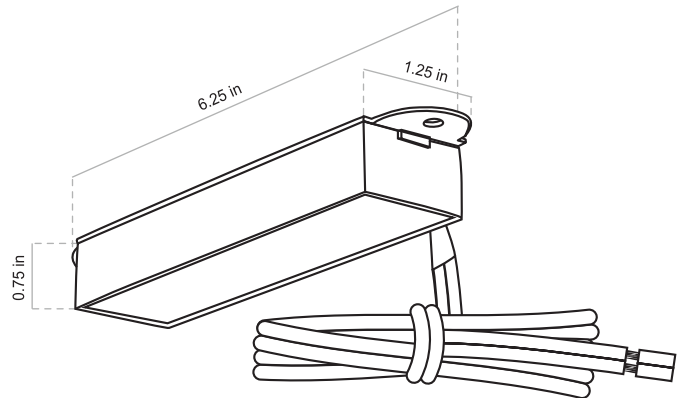

**FINISH OPTIONS:**

|                                   |
|-----------------------------------|
| Aged Brass (Standard)             |
| Premium Black Overcoat (Add -BLK) |

**INTEGRATED RGBW LED BLUETOOTH® MODULE DETAILS:**

|   |
|---|
| <b>WATTS:</b> 1W - 3W   |
| <b>OPERATING VOLTAGE:</b> 10 VAC - 14 VAC   |
| <b>LUMEN OUTPUT:</b> 15lm - 200lm   |
| <b>BEAM SPREAD:</b> 40°   |
| <b>CRI:</b> Ra>80   |
| <b>CCT OPTIONS:</b> 2700K, 3000K, 4000K   |
| <b>RGBW OPTIONS:</b> Unlimited color wheel, quick preset options for red, green blue, amber, and purple |
| <b>DIMMING:</b> 1% - 100% option available for all colors.  |



**HOW TO SPECIFY:** *Example: SL60-BT-BLK*

| BASE PART # | FINISH                 | SUFFIX | ORDERING #  |
|-------------|------------------------|--------|-------------|
| SL60-BT     | Aged Brass (Standard)  |        | SL60-BT     |
|             | Premium Black Overcoat | -BLK   | SL60-BT-BLK |