

**MODEL: SL200 | G4 BIPIN STEP LIGHT**

Small standard step light with junction box that uses a G4 bipin lamp. Louvered face to direct light on the surface and conceal the glare from the light source. Includes optional mudbox for wall installations.

**CONSTRUCTION:** Solid cast brass face plate and metal junction box.

**WIRING:** Pre-Installed 25' wire lead. Brown wire.

**FINISH:** Classic aged brass.

**WARRANTY:** Lifetime warranty on fixture housing.

**LENS:** Louvered face plate.


**CERTIFICATIONS:** Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL & cETL Listed Mark.

**SOCKET:** G4 Bi-Pin, spring-loaded, ceramic, with dual contacts.

**MOUNTING:** Includes metal junction box with knockouts for wiring that can be integrated into wall during construction.

**DIMENSIONS:**

Face Plate Width	_____	6 inches
Face Plate Height	_____	2.875 inches
Junction Box Depth	_____	2.375 inches
Junction Box Height	_____	4.125 inches
Ship Weight	_____	2.89 pounds

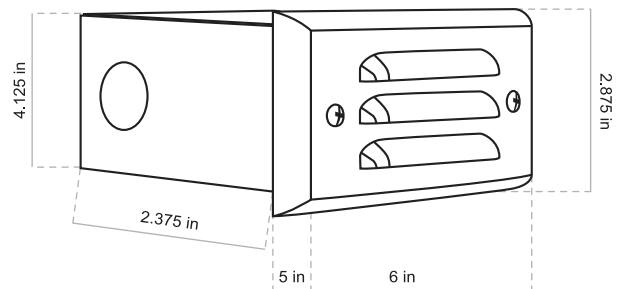

**FINISH OPTIONS:**

Aged Brass (Standard)
Premium Black Overcoat (Add -BLK)

**G4 BIPIN LAMP OPTIONS:**

ADD SUFFIX	WATTAGE	DELIVERED LUMENS	COLOR TEMP.
-LBIPIN-LED-200lm*	2.5	200	2700K
-LBIPIN-LED-250lm	3	250	2700K
-LBIPIN-LED-350lm	3.5	350	2700K

\* = standard light source option



**HOW TO SPECIFY:** Example: SL200-BLK-LED

BASE PART #	FINISH	SUFFIX	ORDERING #	LAMP	ORDERING #
SL200	Aged Brass (Standard)		SL200	Add Lamp Suffix	SL200-LED
	Premium Black Overcoat	-BLK	SL200-BLK		SL200-LED-BLK