


MODEL: WS350-BT | INTEGRATED BT WALL SCONCE LIGHT

Modern professional-grade wall sconce light with integrated Bluetooth® RGBW LED module. This sleek and slender fixture features dual light output from top and bottom to create a decorative glow on exterior walls, lanais, pergolas and gazebos. Lighting module integrates with Alliance's bt System and is controlled with the Alliance bt app. A mounting plate anchors to the mounting surface and the fixture locks into the plate using two color matched screws.

<p>CONSTRUCTION: Solid cast brass fixture and stainless steel mounting plate.</p> <p>FINISH: Classic aged brass, modern premium black overcoat, or simple premium white overcoat.</p> <p>LENS: (2) clear shock-resistant glass lens installed.</p> <p>LIGHT SOURCE: (2) Integrated Bluetooth® LED module pre-connected to the lead.</p>	<p>WIRING: Pre-Installed 25' wire lead. Brown wire.</p> <p>MOUNTING: Stainless steel concealed mounting plate. Fixture attaches to mounting plate with color-matched screws.</p> <p>WARRANTY: 10 year warranty on LED components and fixture housing.</p> <p>CERTIFICATIONS: Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL & cETL Listed Mark.</p>
---	---

DIMENSIONS:

Fixture Height	_____	8 inches
Fixture Width	_____	2.25 inches
Fixture Depth	_____	3.75 inches
Ship Weight	_____	3.13 pounds

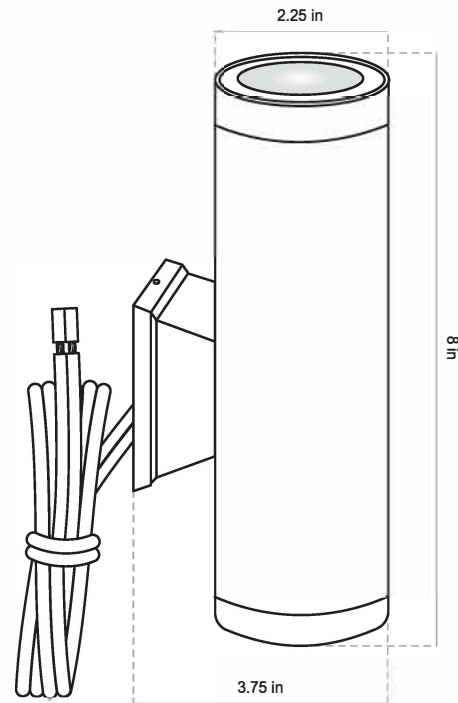

FINISH OPTIONS:

Aged Brass (Standard)
Premium Black Overcoat (Add -BLK)
Premium White Overcoat (Add -WHT)

INTEGRATED RGBW LED BLUETOOTH® MODULE DETAILS:

WATTS: 2W - 4W
OPERATING VOLTAGE: 10 VAC - 14 VAC
LUMEN OUTPUT: 10lm - 430lm
BEAM SPREAD: 25°
CRI: Ra>80
CCT OPTIONS: 2700K, 3000K, 4000K
RGBW OPTIONS: Unlimited color wheel, quick preset options for red, green blue, amber, and purple
DIMMING: 1% - 100% option available for all colors.

HOW TO SPECIFY: Example: WS350-BT-BLK

BASE PART #	FINISH	SUFFIX	ORDERING #
WS350-BT	Aged Brass (Standard)		WS350-BT
	Premium Black Overcoat	-BLK	WS350-BT-BLK
	Premium White Overcoat	-WHT	WS350-BT-WHT

