

MODEL: BOLLARD100 | G4 BIPIN PATH LIGHT

Handsome lighted directional bollard equally suitable for estate-type residential, commercial and institutional pedestrian spaces. Low voltage design easily retrofits to existing installations to visually guide visitors without the expense of new line-voltage electrical circuits.. Large slotted ground stake mounting is provided standard. Perfect for providing secure lighting along pathways and routes.

CONSTRUCTION: Solid brass 3-tier cover and louvers. Stainless steel post with aged brass finish.

FINISH: Classic aged brass, premium black overcoat.

SOCKET: G4 Bi-Pin, spring-loaded, ceramic, with dual contacts.

LENS: Frosted polycarbonate lens installed. Optional clear lens included.

MOUNTING: Stainless steel mounting base with 3 anchor L-bolts for installation into a poured concrete footing.

INSTALLATION: For best results, footing should be higher than finished grade to protect fixture base from trimmers in lawn areas.


WIRING: Pre-Installed 36" 16AWG wire lead. Brown wire with aged brass finish, black wire with black overcoat.

WARRANTY: 10 year warranty on LED components and fixture housing.

CERTIFICATIONS: Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL & cETL Listed Mark.

DIMENSIONS:

Fixture Height _____	29.5 inches
Base Width _____	5 inches
Top of Stem to Top of Fixture Height _____	7.5 inches
Top Width _____	6 inches
Ship Weight _____	14.13 pounds

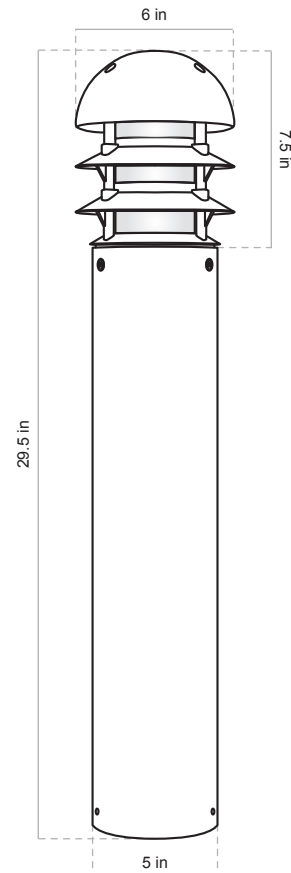

FINISH OPTIONS:

Aged Brass (Standard)
Premium Black Overcoat (Add -BLK)

G4 BIPIN LAMP OPTIONS:

ADD SUFFIX	WATTAGE	DELIVERED LUMENS	COLOR TEMP.
-LBIPIN-LED-200lm	2.5	200	2700K
-LBIPIN-LED-250lm	3	250	2700K
-LBIPIN-LED-350lm*	3.5	350	2700K

* = standard light source option



HOW TO SPECIFY: Example: BOLLARD100-BLK-LED

BASE PART #	FINISH	SUFFIX	ORDERING #	LAMP	ORDERING #
BOLLARD100	Aged Brass (Standard)		BOLLARD100	Add Lamp Suffix	BOLLARD100-LED
	Premium Black Overcoat	-BLK	BOLLARD100-BLK		BOLLARD100-BLK-LED