

**MODEL: ML15-LED | INTEGRATED LED MINI LIGHT**

A versatile integrated mini LED fixture that allows light to be added to unusual and creative places. Optional stainless steel stake, and glare shield included. Illuminate stone lanterns, rock niches, under steps, etc. Anywhere a small pool of light is needed. Not to be submerged in water.

**CONSTRUCTION:** Solid brass body and glare shield. Mounting ears for surface mount or glare shield attachment.

**FINISH:** Classic aged brass or modern premium black overcoat.

**LENS:** Polycarbonate lens installed.

**MOUNTING:** Optional stainless steel stake.


**WIRING:** 10' wire lead, 16 AWG (UL Listed) pre-connected to the fixture, pre-stripped for easy wire connection. Brown wire with aged brass finish, black wire with black overcoat.

**WARRANTY:** 10 year warranty on LED components and fixture housing.

**CERTIFICATIONS:** Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL & cETL Listed Mark.

**DIMENSIONS:**

Fixture Height	_____	1.25 inches
Fixture Width	_____	0.75 inches
Fixture Depth	_____	0.625 inches
Fixture Depth with Shield	_____	1 inch
Stake Length	_____	5.9 inches
Ship Weight	_____	0.58 pounds

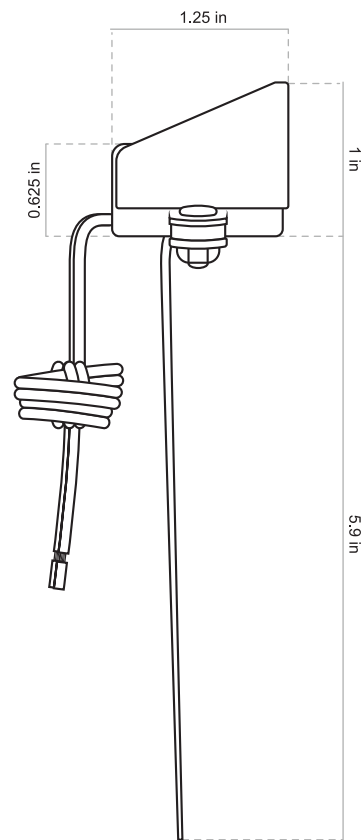

*Illustrated with optional glare shield and stainless steel stake attached.*

**FINISH OPTIONS:**

Aged Brass (Standard)
Premium Black Overcoat (Add -BLK)

**INTEGRATED LED MODULE DETAILS:**

<b>WATTS:</b> 1.3W
<b>COLOR:</b> Soft White
<b>COLOR TEMPERATURE:</b> 2900K
<b>OPERATING VOLTAGE:</b> 10 VAC - 15 VAC
<b>CRI:</b> Ra>80
<b>RATED HOURS:</b> 30,000 Hours
<b>AMBIENT OPERATING TEMPERATURE:</b> ~40°C ~ +85°C
<b>DIMMING:</b> None
<b>LUMENS:</b> 135lm



**HOW TO SPECIFY:** *Example: ML15-LED-BLK*

BASE PART #	FINISH	SUFFIX	ORDERING #
ML15-LED	Aged Brass (Standard)		ML15-LED
	Premium Black Overcoat	-BLK	ML15-LED-BLK