

MODEL: BL900 | MR16 ACCENT / UPLIGHT

Medium sized solid brass bullet light with a long telescoping adjustable shroud for aiming and glare control. If desired, shroud can be removed. Uses MR16 lamp. Solid brass housing base is completed with a convex glass lens. Adjustable knuckle is locked with thumbscrews. Ground stake mounting is provided standard. Dual wire leads are factory-installed. Lamp purchased separately. Ideal for up lighting medium to large trees, columns, and walls while being mount in planter areas. Not intended to be used as a downlight or installed into areas with lawn-mower traffic or foot traffic.

CONSTRUCTION: Die-Casted solid brass housing, shroud and knuckle. CNC brass thumbscrews. 1/2" NPT threading from knuckle to mount.

FINISH: Classic aged brass.

SHROUD & LENS: Long telescoping adjustable shroud for aiming and glare control. Rotates 360° on the housing, pressure locked with dual o-ring seal. Convex tempered, shock-resistant glass lens.

KNUCKLE: Solid brass with brass thumbscrew for angle adjustments.

MOUNTING: Pre-installed standard 8" plastic ground stake (STAKE-P1). Slotted for easy removal without having to cut the wire lead.

WIRING: Pre-Installed dual 16AWG wire leads, primary 25' wire lead, and optional 18" wire lead for daisy chaining to other fixtures. Brown wire.


SOCKET: MR16, spring-loaded, ceramic, dual contacts, & lamp clips.

WARRANTY: Lifetime warranty on fixture housing.

CERTIFICATIONS: Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL & cETL Listed Mark.

DIMENSIONS:

- Height from top of stake to top of knuckle _____ 1.75 inches
- Shroud Width _____ 2.25 inches
- Shroud Height _____ 5.5 inches
- Ship Weight _____ 2.74 pounds

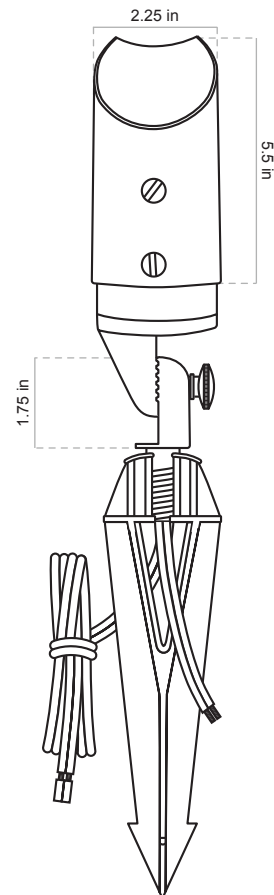

FINISH OPTIONS:

Aged Brass (Standard)
Premium Black Overcoat (Add -BLK)

MR16 LAMP OPTIONS:

ADD SUFFIX	WATTAGE	DELIVERED LUMENS	COLOR TEMP.
-LMR16-LED-4W-NS	4	250	2900K
-LMR16-LED-4W-F	4	250	2900K
-LMR16-LED-4W-WF	4	250	2900K
-LMR16-LED-4W-250lm	4	250	2900K
-LMR16-LED-4W-2700K	4	250	2700K
-LMR16-LED-5W-NS	5	310	2900K
-LMR16-LED-5W-F*	5	310	2900K
-LMR16-LED-5W-WF	5	310	2900K
-LMR16-LED-5W-310lm	5	310	2900K
-LMR16-LED-5W-2700K	5	310	2700K
-LMR16-LED-6W-F	6	410	2900K
*-LMR16-LED-6W-2700K	6	410	2700K

= standard light source option



1/2" NPT MOUNTING OPTIONS (SOLD SEPARATELY):

STAKE-P3 – Giant Slotted 14" Plastic Ground Stake
PERMAPOST – Heavy Duty Stake with Brass Locking Nut & Stabilizing Fins
RMB – Brass Round Mounting Base
RMB-BLK – Black Overcoat Brass Round Mounting Base
RISER6 – 6" Fixed Riser, Aged Brass
RISER12 – 12" Fixed Riser, Aged Brass
RISER18 – 18" Fixed Riser, Aged Brass
RISER6-BLK – 6" Fixed Riser, Premium Black
RISER12-BLK – 12" Fixed Riser, Premium Black
RISER18-BLK – 18" Fixed Riser, Premium Black

MR16 LAMP ACCESSORIES:

HEXLOUVER-MR16 – Black aluminum honeycomb used to reduce glare.
MR16-FROSTED – Flat frosted glass lens used to diffuse light output.

HOW TO SPECIFY: Example: BL900-BLK-LED4W

BASE PART #	FINISH	LAMP	ORDERING NUMBER	ORDER ACCESSORIES
BL900	Aged Brass (Standard)	Add Lamp Suffix	BL900-LED4W	Mounting Risers Lenses
	Black Overcoat (-BLK)	Add Lamp Suffix	BL900-BLK-LED4W	