

**MODEL: POST100 | MR16 POST LIGHT**

Large Craftsman / prairie-style post or column fixture that uses an MR16 lamp. Four frosted panels create a guiding nighttime glow. Surface mount to the top of posts or columns using the mounting base. Impressive appearance, perfect for stone or masonry columns.

**CONSTRUCTION:** Solid cast brass body, hat, and base plate.

**WIRING:** Pre-Installed 25' wire lead. Brown wire.

**FINISH:** Classic aged brass or premium black overcoat.

**WARRANTY:** Lifetime warranty on fixture housing.

**LENS:** Frosted polycarbonate lens panels.

**CERTIFICATIONS:** Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL & cETL Listed Mark.

**SOCKET:** MR16, spring-loaded, ceramic, dual contacts, & lamp clips.

**MOUNTING:** Concealed mounting base plate. Fixture face attaches to mounting base with color matched Phillips screws. Splices are made remotely from fixture, not in base plate.


**DIMENSIONS:**

Body Width \_\_\_\_\_ 7.75 inches

Body Height \_\_\_\_\_ 12 inches

Hat Width \_\_\_\_\_ 11 inches

Ship Weight \_\_\_\_\_ 12.96 pounds

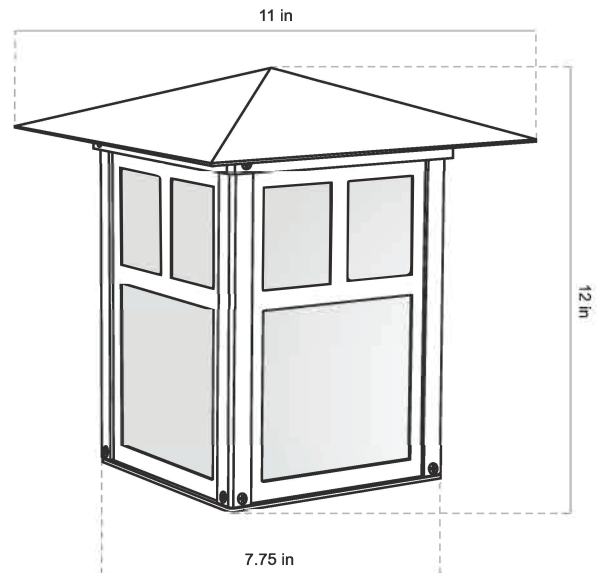

**FINISH OPTIONS:**

Aged Brass (Standard)
Premium Black Overcoat (Add -BLK)

**MR16 LAMP OPTIONS:**

ADD SUFFIX	WATTAGE	DELIVERED LUMENS	COLOR TEMP.
-LMR16-LED-4W-NS	4	250	2900K
-LMR16-LED-4W-F*	4	250	2900K
-LMR16-LED-4W-WF	4	250	2900K
-LMR16-LED-4W-250lm	4	250	2900K
-LMR16-LED-4W-2700K	4	250	2700K
-LMR16-LED-5W-NS	5	310	2900K
-LMR16-LED-5W-F	5	310	2900K
-LMR16-LED-5W-WF	5	310	2900K
-LMR16-LED-5W-310lm	5	310	2900K
-LMR16-LED-5W-2700K	5	310	2700K
-LMR16-LED-6W-F	6	410	2900K
-LMR16-LED-6W-2700K	6	410	2700K

\*= standard light source option

**HOW TO SPECIFY:** Example: POST100-LED

BASE PART #	FINISH	SUFFIX	ORDERING #	LAMP	ORDERING #
POST100	Aged Brass (Standard)		POST100	Add Lamp Suffix	POST100-LED
	Premium Black Overcoat	-BLK	POST100-BLK		POST100-LED-BLK

