

MODEL: PL250 | ADJUSTABLE G4 BIPIN PATH LIGHT

Featuring a fully-adjustable stem height, this traditional-styled brass fixture with mini hat allows you to control the light spread precisely from large spread to focused pools. Dual wire leads are factory-installed. Heavy-duty stake with push and lock system secured with a color matched screw is provided. Perfect for providing secure lighting along pathways or setting a mood to accentuate landscape elements along the route.

CONSTRUCTION: Solid brass stem, hat, and stake.

FINISH: Classic aged brass, premium black overcoat

HAT: 2-tier brass hat with collar and lens attached. Clear, shock-resistant glass lens.

STEM: Telescoping stem allows height adjustment for light spread control.

SOCKET: G4 Bi-Pin, spring-loaded, ceramic, with dual contacts.

MOUNTING: Solid brass ground stake (standard) with locking set screw.

WIRING: Pre-Installed dual 16AWG wire leads, primary 25' wire lead, and optional 18" wire lead for daisy chaining to other fixtures. Brown wire with aged brass finish. Black wire with premium black overcoat

WARRANTY: Lifetime warranty on fixture housing.


CERTIFICATIONS: Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL & cETL Listed Mark.

DIMENSIONS:

Hat Diameter _____ 4 inches

Fixture Height _____ 17 - 27 inches

Ship Weight _____ 3.39 pounds

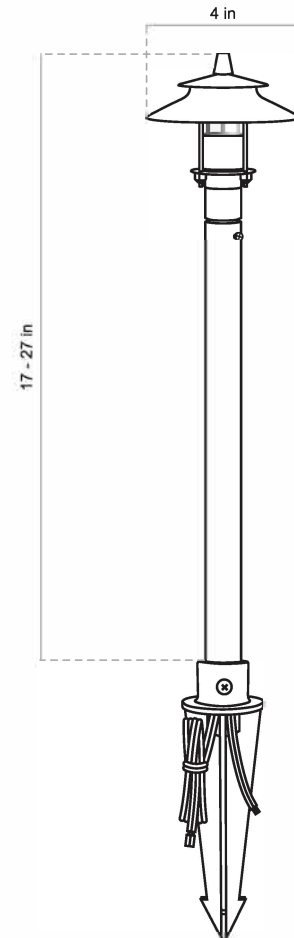

FINISH OPTIONS:

Aged Brass (Standard)
Premium Black Overcoat (Add -BLK)

G4 BIPIN LAMP OPTIONS:

ADD SUFFIX	WATTAGE	DELIVERED LUMENS	COLOR TEMP.
-LBIPIN-LED-200lm*	2.5	200	2700K
-LBIPIN-LED-250lm	3	250	2700K

* = standard light source option



HOW TO SPECIFY: Example: PL250-LED

BASE PART #	FINISH	SUFFIX	ORDERING #	LAMP	ORDERING #
PL250	Aged Brass (Standard)		PL250	Add Lamp Suffix	PL250-LED
PL250	Premium Black Overcoat (Add -BLK)		PL250-BLK		PL250-BLK-LED