

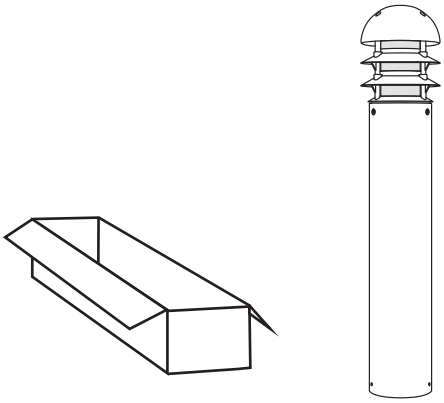



STEP 1: Remove the bollard from the packaging and place in front of you.

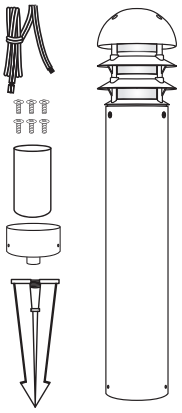


STEP 2: Reach inside the bollard and remove the mounting base, plastic stake, wire lead, frosted lens and mounting base screws.




STEP 3: (A) Fish the wire lead through the mounting base and stake (B) then secure the mounting base to the bollard with the 3 screws provided. (3 extra screws also provided).



STEP 4: (C) Loosen and remove the 3 screws on the very top of the bollard and (D) remove the top cap of the bollard to access the lamp holder/socket. Remove the clear lens and install the lamp.

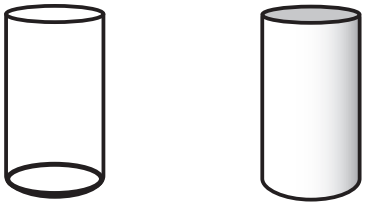

STEP 5: Choose which lens you want to use (Clear or Frosted) and reassemble the top of the fixture.

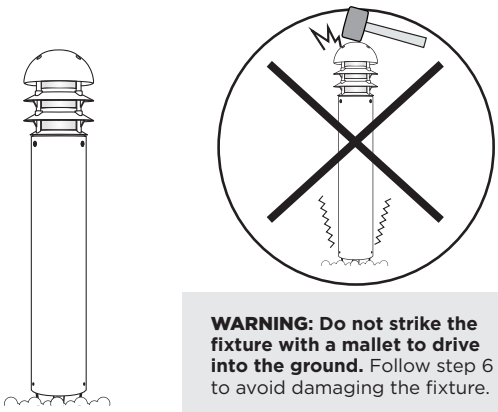

WARNING: Do not strike the fixture with a mallet to drive into the ground. Follow step 6 to avoid damaging the fixture.

STEP 6: Loosen soil with a shovel then place bollard in the loosened soil and connect the wire lead to your system.

ALLIANCE
OUTDOOR LIGHTING