ALLIANCE OUTDOOR LIGHTING

SPECIFICATION SHEET

Type: _____

Model: _____

Project: _____

MODEL: **ALSTEM60** | G4 BIPIN AREA LIGHT STEM

Decorative 60” brass stem. Dual wire lead is provided. Includes PERMAPOST for deep ground anchoring to ensure stabilization. Lamp is sold separately. Typically combined with the TIKI hat (sold separately) to create a festive backyard environment.

CONSTRUCTION: Die-Casted solid brass collar, and stem. CNC brass thumbscrew. 1/2” NPT threading from stem to mount.

FINISH: Classic aged brass or modern premium black overcoat.

STEM: 60” brass stem.

SOCKET: G4 Bi-Pin, spring-loaded, ceramic, with dual contacts.

MOUNTING: Heavy duty stake with brass locking nut & stabilizing fins (PERMAPOST).


WIRING: Pre-installed dual 18AWG wire leads, primary 25’ wire lead, and optional 18” wire lead for daisy chaining to other fixtures. Brown wire with aged brass finish, black wire with black overcoat.

WARRANTY: Lifetime warranty on fixture housing.

CERTIFICATIONS: Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL & cETL Listed Mark.

DIMENSIONS

Stem Height:	60 inches
Stem Diameter:	1 inch
Ship Weight:	2.6 lbs

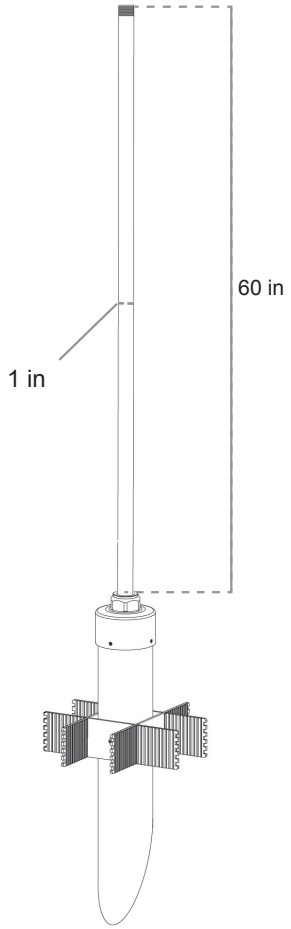

ALLIANCE OUTDOOR LIGHTING

SPECIFICATION SHEET

MODEL: **ALSTEM60** | G4 BIPIN AREA LIGHT STEM

FINISH OPTIONS:

Aged Brass (Standard)
Premium Black Overcoat (Add -BLK)

G4 BIPIN LAMP OPTIONS:

ADD SUFFIX	WATTAGE	DELIVERED LUMENS	COLOR TEMP
-LBIPIN-LED-200lm*	**2.5**	**200**	2700K
-LBIPIN-LED-250lm	**3**	**250**	2700K
-LBIPIN-LED-350lm*	**3.5**	**350**	2700K

***= *standard light source option*



Intertek

HOW TO SPECIFY: *Example: ALSTEM60-LED-BLK*

BASE PART #	FINISH	SUFFIX	ORDERING #	LAMP	ORDERING #	ORDER HAT
ALSTEM60	Aged Brass (Standard)		ALSTEM60	Add Lamp Suffix	ALSTEM60-LED	TIKI
	Premium Black Overcoat	-BLK	ALSTEM60-BLK			