


MODEL: IT2-300 | 300 WATT INTELLIGENT TRANSFORMER

Next-generation transformer and app-driven control system in a single easy-to-install package. Controlled with the Alliance IT Pro app through Bluetooth® or WiFi for remote on/off control and set-up of lighting schedules. Ability to manage up to 3 independently-scheduled lighting zones in a single transformer for maximum flexibility and energy savings. Ideal for high quality, medium-scale lighting projects.

<p>CONSTRUCTION: Stainless steel cabinet. Removable door, bottom panel, and 5 knockouts for wire connections.</p> <p>BREAKER RESET SWITCH: Simple breaker reset switch for power overloads, short circuits, or ground faults.</p> <p>MOUNTING: Double keyhole mounts on mounting bracket for flush wall mounting. Mounting hardware included.</p> <p>ANTENNA: Maximum control range. Discreet integrated external antenna plus dual control with Bluetooth® or WiFi. (WiFi is optional, not required)</p> <p>ZONE CONTROL: Up to 3 individually-scheduled zones for maximum lighting control</p> <p>INTELLIGENT FEATURES: Can integrate with Amazon Alexa® for voice control.</p>	<p>APP FEATURES: App-controlled on/off remote control and scheduling. Digital power meter (in app) displays real-time power consumption and history. Settings saved to the cloud in case of power interruption.</p> <p>POWER BUTTON / INDICATOR LIGHT: Manuel power button and indicator light. Allows troubleshooting without accessing app.</p> <p>WIFI & BLUETOOTH®: WiFi is optional, not required. Wi-Fi 802.11b, 2.4GHz and Bluetooth® 5 connections.</p> <p>WIRING: 5' standard 120 volt grounded wall plug with a ground (NEMA 5-15 receptacle).</p> <p>WARRANTY: Lifetime warranty on enclosure and transformer winding.</p> <p>CERTIFICATIONS: Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL & cETL Listed Mark.</p>
---	---

DIMENSIONS:

Height	_____	16 inches
Width	_____	7.25 inches
Depth	_____	5.12 inches
Ship Weight	_____	13.5 pounds

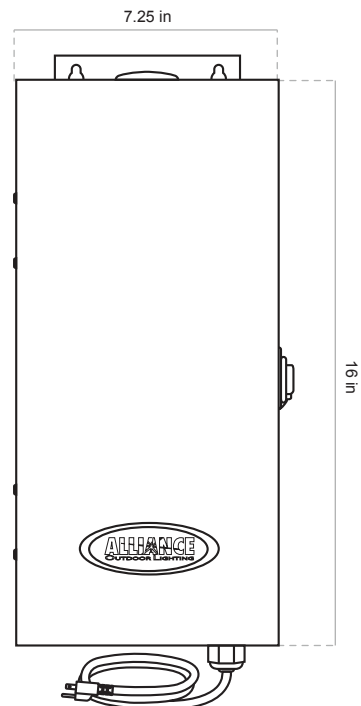

SPECIFICATIONS:

CAPACITY: 300 watts
MAX AMPERAGE (LOAD): 3 amps
MAX INPUT (PRIMARY VOLTAGE): 120 volts
SECONDARY VOLTAGE: 14 volts
AVAILABLE VOLTAGE TAPS: 3

TRANSFORMER MOBILE APPLICATION:

it **PRO APP** – Search “Alliance it Pro” in the app store or scan and download below. Smart transformer control. Switch on and off, program custom events, and review the transformers power meter.

