


MODEL: GL100-BT | INTEGRATED BT IN-GROUND LIGHT

Small professional-grade in-ground light with integrated Bluetooth® RGBW LED module. Shrouded convex lens ideal for wall washing and directional uplighting. Lighting module integrates with Alliance's bt System and is controlled with bt System mobile app. PVC sleeve included for stabilizing into the ground. Core-drill for placement into hardscapes or dig a small hole into softscapes. Not intended to be submerged or placed in wet areas. Ok for foot traffic, but not suitable for areas where they may be driven over by vehicles.

<p>CONSTRUCTION: Cast brass housing base. Solid brass top with stainless steel screws.</p>	<p>MOUNTING: Optional 2.75" PVC installation sleeve included.</p>
<p>FINISH: Classic aged brass or modern premium black overcoat.</p>	<p>WIRING: Pre-Installed dual 16AWG wire leads, primary 25' wire lead, and optional 18" wire lead for daisy chaining to other fixtures. Brown wire with aged brass finish, black wire with black overcoat.</p>
<p>LID: Shrouded open faced brass lid with clear convex glass lens. Attached with 4 color-matched stainless steel screws.</p>	<p>WARRANTY: 10 year warranty on LED components and fixture housing.</p>
<p>LIGHT SOURCE: Integrated Bluetooth® LED module pre-connected to the lead.</p>	<p>CERTIFICATIONS: Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL & cETL Listed Mark.</p>

DIMENSIONS:

Lid Diameter	_____	3.5 inches
Lid Height	_____	1.5 inches
Base Diameter	_____	2.38 inches
Base Height	_____	3.5 inches
Ship Weight	_____	3.41 pounds

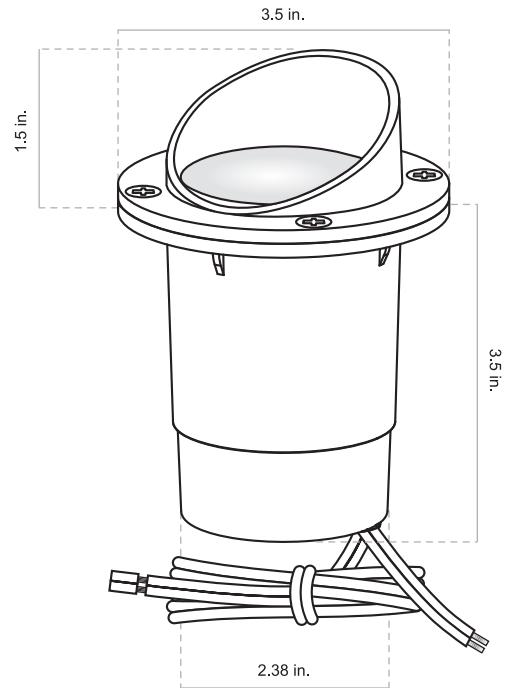

FINISH OPTIONS:

Aged Brass (Standard)
Premium Black Overcoat (Add <i>-BLK</i>)

INTEGRATED RGBW LED BLUETOOTH® MODULE DETAILS:

WATTS: 2W - 4W
OPERATING VOLTAGE: 10 VAC - 14 VAC
LUMEN OUTPUT: 10lm - 430lm
BEAM SPREAD: 40°
CRI: Ra>80
CCT OPTIONS: 2700K, 3000K, 4000K
RGBW OPTIONS: Unlimited color wheel, quick preset options for red, green blue, amber, and purple.
DIMMING: 1% - 100% option available for all colors.

HOW TO SPECIFY: *Example: GL100-BT-BLK*

BASE PART #	FINISH	SUFFIX	ORDERING #
GL100-BT	Aged Brass (Standard)		GL100-BT
	Premium Black Overcoat	-BLK	GL100-BT-BLK

