

MODEL: HSC-BL1 | MR16 ACCENT / UPLIGHT

Heavy sand cast bronze accent/uplight that uses an MR16 lamp. Includes an adjustable shroud and convex glass lens. Robust knuckle is adjustable and locked with a set screw. Rugged small bronze slotted stake uses a push and lock system with a set screw. Wire lead is factory-installed to the fixture. Lamp is purchased separately. Often applied where client desires a fixture with a thicker, chunkier appearance.

CONSTRUCTION: Heavy sand-cast bronze housing, shroud and knuckle.

FINISH: Classic aged brass.

SHROUD & LENS: Rotates 360° on the housing, pressure locked with o-ring seal. Convex tempered, shock-resistant glass lens that reduces calcification is silicone to the shroud.

KNUCKLE: Sand-cas bronze with set screw for angle adjustments.

MOUNTING: Sand-cast bronze small 8" ground stake. Slotted for easy removal without having to cut the wire lead.

WIRING: Pre-Installed 16AWG 25' wire lead. Black wire with heavy sand-cast bronze fixtures.

SOCKET: Spring-loaded ceramic bi-pin G4 socket with dual contacts. Lamp clips accept and grab MR16 lamps.

WARRANTY: Lifetime warranty on fixture housing.

CERTIFICATIONS: Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL & cETL Listed Mark.

DIMENSIONS:


Height from top of stake to tip of shroud _____ 6.5 inches

Height from top of stake to top of knuckle _____ 2.5 inches

Shroud Width _____ 2.5 inches

Shroud Height _____ 3 inches

Ship Weight _____ 4.39 pounds

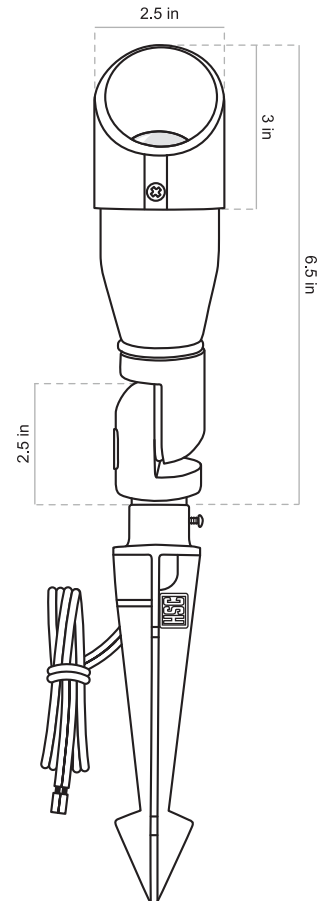

FINISH OPTIONS:

Heavy Sand-Cast Bronze (Standard)

MR16 LAMP ACCESSORIES:

HEXLOUVER-MR16 – Black aluminum honeycomb used to reduce glare.
MR16-FROSTED – Flat frosted glass lens used to diffuse light output.



MR16 LAMP OPTIONS:

ADD SUFFIX	WATTAGE	BEAM ANGLE	DELIVERED LUMENS	COLOR TEMPERATURE	BASE COLOR CODE
-LED-4W-NS	4	15°	250	2900K	BLACK
-LED-4W-F	4	45°	250	2900K	BLACK
-LED-4W-WF	4	60°	250	2900K	BLACK
-LED-5W-NS	5	15°	310	2900K	WHITE
-LED-5W-F	5	45°	310	2900K	WHITE
-LED-5W-WF	5	60°	310	2900K	WHITE
-LED-6W-F	6	45°	400	2900K	BLUE
-LED-4W-2700K	4	45°	250	2700K	BLACK
-LED-5W-2700K	5	45°	310	2700K	WHITE
-LED-6W-2700K	6	45°	400	2700K	BLUE

HOW TO SPECIFY: *Example: HSC-BL1-LED5W-WF*

BASE PART #	FINISH	LAMP	ORDERING NUMBER	ORDER ACCESSORIES
HSC-BL1	Aged Brass (Standard)	Add Lamp Suffix	HSC-BL1-LED5W-WF	Hex Louver Lenses