

MODEL: GOLF50-BT | INTEGRATED BT AREA FLOOD LIGHT

Special fixture for wide, glare-free lighting of putting greens, tee boxes, sports courts, paved areas and displays. 23" stem with 45-degree angle keeps beam below eye level while wash effect provides wide dispersal.

CONSTRUCTION: Solid brass head and brass 45° stem. 1/2" NPT threading from stem to mount.

FINISH: Classic aged brass.

LENS: Frosted polycarbonate lens.

LIGHT SOURCE: Integrated Bluetooth® LED module pre-connected to the wire lead.

MOUNTING: Pre-installed large 8.5" plastic ground stake (STAKE-P2). Slotted for easy removal without having to cut the wire lead.

WIRING: Pre-Installed 25' wire lead. Brown wire.

WARRANTY: 10 year warranty on LED components and fixture housing.

CERTIFICATIONS: Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL & cETL Listed Mark.


DIMENSIONS:

Height from Top of Stake to Knuckle _____ 23.5 inches

Head Height _____ 2 inches

Head Width _____ 4 inches

Ship Weight _____ 4.42 pounds

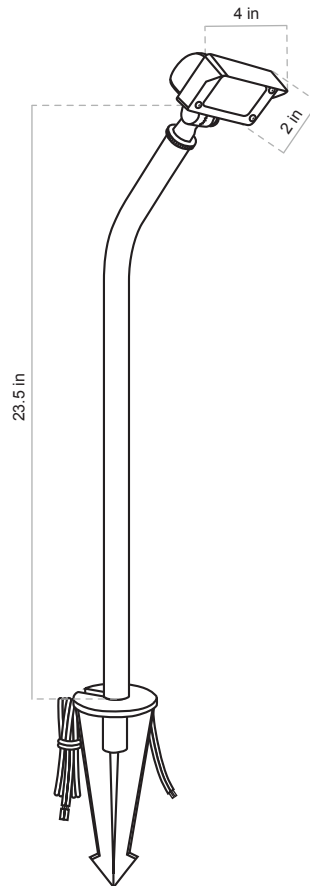

FINISH OPTIONS:

Aged Brass (Standard)

INTEGRATED RGBW LED BLUETOOTH® MODULE DETAILS:

WATTS: 2W - 4W
OPERATING VOLTAGE: 10 VAC - 14 VAC
LUMEN OUTPUT: 10lm - 350lm
BEAM SPREAD: 120°
CRI: Ra>80
CCT OPTIONS: 2700K, 3000K, 4000K
RGBW OPTIONS: Unlimited color wheel, quick preset options for red, green blue, amber, and purple
DIMMING: 1% - 100% option available for all colors.

1/2" NPT MOUNTING OPTIONS (SOLD SEPARATELY):

STAKE-P3 – Giant Slotted 14" Plastic Ground Stake
PERMAPOST – Heavy Duty Stake with Brass Locking Nut & Stabilizing Fins
RMB – Brass Round Mounting Base

HOW TO SPECIFY: *Example: GOLF50-BT-LED*

BASE PART #	FINISH	SUFFIX	ORDERING #
GOLF50-BT	Aged Brass (Standard)		GOLF50-BT

