


**MODEL: PL100-BT | INTEGRATED BT ADJUSTABLE PATH LIGHT**

Elegant curved stem path fixture provides visual interest as well as the ultimate in aiming. The fixture hat can be pivoted to control light beam and reduce glare. Large slotted ground stake mounting is provided standard. Dual wire leads are factory-installed. Integrated Bluetooth® module allows ultimate control with tunable white, RGB color changing and dimming capabilities. Perfect for providing secure lighting along pathways or setting a mood to accentuate landscape elements along the route.

<p><b>CONSTRUCTION:</b> Solid brass stem and hat. Fully adjustable hat with locking screw CNC brass thumbscrew. 1/2" NPT threading from stem to mount.</p>	<p><b>MOUNTING:</b> Pre-installed large 8.5" plastic ground stake (STAKE-P2). Slotted for easy removal without having to cut the wire lead.</p>
<p><b>FINISH:</b> Classic aged brass or modern premium black overcoat.</p>	<p><b>WIRING:</b> Pre-Installed dual 16AWG wire leads, primary 25' wire lead, and optional 18" wire lead for daisy chaining to other fixtures. Brown wire with aged brass finish, black wire with black overcoat.</p>
<p><b>STEM:</b> Curved shepherd hook style brass stem.</p>	<p><b>WARRANTY:</b> 10 year warranty on LED components and fixture housing.</p>
<p><b>LIGHT SOURCE:</b> Integrated Bluetooth® LED module pre-connected to the lead.</p>	<p><b>CERTIFICATIONS:</b> Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL &amp; cETL Listed Mark.</p>
<p><b>LENS:</b> Frosted polycarbonate bubble lens installed.</p>	

**DIMENSIONS:**

- Top of Stake to Top of Stem \_\_\_\_\_ 19 inches
- Back of Stem to Front of Hat \_\_\_\_\_ 10 inches
- Hat Height \_\_\_\_\_ 4.2 inches
- Hat Width \_\_\_\_\_ 5.2 inches
- Ship Weight \_\_\_\_\_ 3.92 pounds

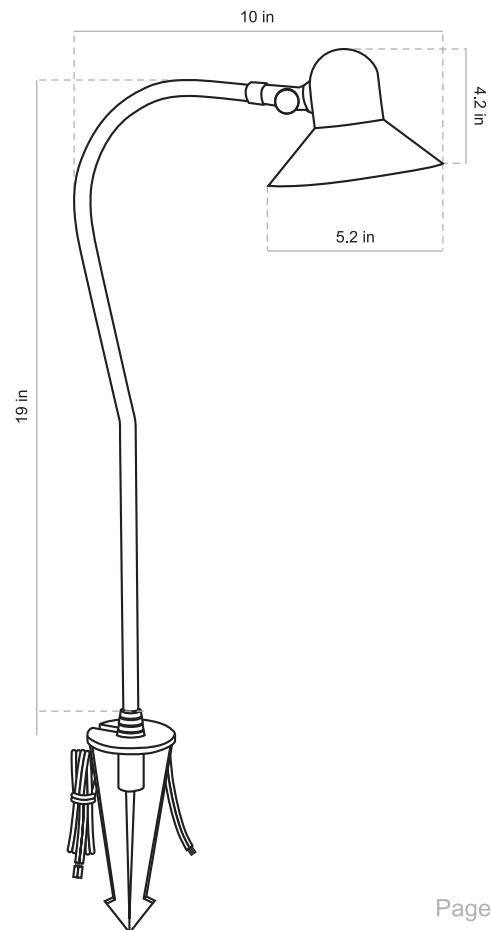

**FINISH OPTIONS:**

Aged Brass (Standard)
Premium Black Overcoat (Add -BLK)

**INTEGRATED RGBW LED BLUETOOTH® MODULE DETAILS:**

<b>WATTS:</b> 2W - 6W
<b>OPERATING VOLTAGE:</b> 10 VAC - 14 VAC
<b>LUMEN OUTPUT:</b> 10lm - 350lm
<b>BEAM SPREAD:</b> 120°
<b>CRI:</b> Ra>80
<b>CCT OPTIONS:</b> 2700K, 3000K, 4000K
<b>RGBW OPTIONS:</b> Unlimited color wheel, quick preset options for red, green blue, amber, and purple
<b>DIMMING:</b> 1% - 100% option available for all colors.

**1/2" NPT MOUNTING OPTIONS (SOLD SEPARATELY):**

<b>STAKE-P3</b> – Giant Slotted 14" Plastic Ground Stake
<b>PERMAPOST</b> – Heavy Duty Stake with Brass Locking Nut & Stabilizing Fins
<b>RMB</b> – Brass Round Mounting Base
<b>RMB-BLK</b> – Black Overcoat Brass Round Mounting Base

**HOW TO SPECIFY:** *Example: PL100-BT-BLK*

BASE PART #	FINISH	SUFFIX	ORDERING #	ORDER ACCESSORIES
PL100-BT	Aged Brass (Standard)		PL100-BT	Mounting
	Premium Black Overcoat	-BLK	PL100-BT-BLK	

