

MODEL: PL100 | ADJUSTABLE G4 BIPIN PATH LIGHT

Elegant curved stem path fixture provides visual interest as well as the ultimate in aiming. The fixture hat can be pivoted to control light beam and reduce glare. Large slotted ground stake mounting is provided standard. Dual wire leads are factory-installed. Perfect for providing secure lighting along pathways or setting a mood to accentuate landscape elements along the route.

CONSTRUCTION: Solid brass stem and hat. Fully adjustable hat with locking screw CNC brass thumbscrew. 1/2" NPT threading from stem to mount.

FINISH: Classic aged brass or modern premium black overcoat.

STEM: Curved shepherd hook style brass stem.

SOCKET: G4 Bi-Pin, spring-loaded, ceramic, with dual contacts.

LENS: Frosted polycarbonate bubble lens installed.

MOUNTING: Pre-installed large 8.5" plastic ground stake (STAKE-P2). Slotted for easy removal without having to cut the wire lead.


WIRING: Pre-Installed dual 16AWG wire leads, primary 25' wire lead, and optional 18" wire lead for daisy chaining to other fixtures. Brown wire with aged brass finish, black wire with black overcoat.

WARRANTY: Lifetime warranty on fixture housing.

CERTIFICATIONS: Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL & cETL Listed Mark.

DIMENSIONS:

- Top of Stake to Top of Stem _____ 19 inches
- Back of Stem to Front of Hat _____ 10 inches
- Hat Height _____ 4.2 inches
- Hat Width _____ 5.2 inches
- Ship Weight _____ 3.92 pounds

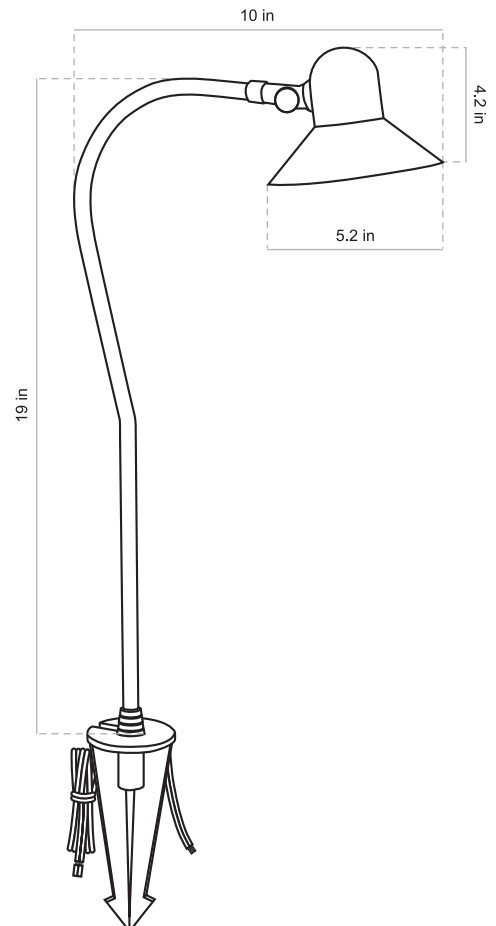

FINISH OPTIONS:

| |
|-----------------------------------|
| Aged Brass (Standard) |
| Premium Black Overcoat (Add -BLK) |

G4 BIPIN LAMP OPTIONS:

| ADD SUFFIX | WATTAGE | DELIVERED LUMENS | COLOR TEMP. |
|--------------------|---------|------------------|-------------|
| -LBIPIN-LED-200lm* | 2.5 | 200 | 2700K |
| -LBIPIN-LED-250lm | 3 | 250 | 2700K |
| -LBIPIN-LED-350lm | 3.5 | 350 | 2700K |

* = standard light source option

1/2" NPT MOUNTING OPTIONS (SOLD SEPARATELY):

| |
|---|
| STAKE-P3 – Giant Slotted 14" Plastic Ground Stake |
| PERMAPOST – Heavy Duty Stake with Brass Locking Nut & Stabilizing Fins |
| RMB – Brass Round Mounting Base |
| RMB-BLK – Black Overcoat Brass Round Mounting Base |

HOW TO SPECIFY: Example: PL100-BLK-LED

| BASE PART # | FINISH | SUFFIX | ORDERING # | LAMP | ORDERING # | ORDER ACCESSORIES |
|-------------|------------------------|--------|------------|-----------------|---------------|-------------------|
| PL100 | Aged Brass (Standard) | | PL100 | Add Lamp Suffix | PL100-LED | Mounting |
| | Premium Black Overcoat | -BLK | PL100-BLK | | PL100-BLK-LED | |

