

## MODEL: TAPE-LED | INTEGRATED LED TAPE LIGHT

Continuous strip of LED emitters available in 5', 15' or 30' lengths that can be trimmed (scrap tape cannot be re-used). Can be affixed directly to surfaces. Includes an integrated frosted diffusing lens. Typically installed facing down on railings, step risers, toe-kicks, under cabinets, etc.

**CONSTRUCTION:** LED strip, flexible rubber silicone casing installed.

**WIRING:** Pre-Installed 10' wire lead. Brown wire.

**LENGTH OPTIONS:** 5, 15, or 30 feet length options available.

**WARRANTY:** 10 year warranty on LED components and fixture housing.

**LIGHT SOURCE:** Integrated LED strip pre-connected to the lead.

**CERTIFICATIONS:** Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL & cETL Listed Mark.


**MOUNTING:** Directly to surface, trim to length needed. Installed sleeve includes frosted diffusing silicone sleeve.

### DIMENSIONS:

Tape Casing Height \_\_\_\_\_ 0.5 inches

Tape Casing Width \_\_\_\_\_ 0.5 inches

Tape Length \_\_\_\_\_ 5, 15, or 30 feet

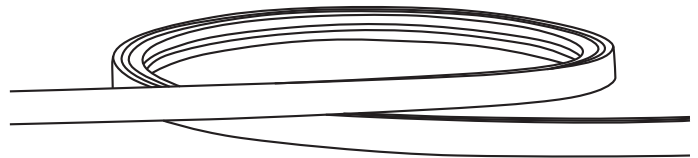

**LENGTH OPTIONS:**

<b>5 Feet</b> (Add - 5FT) 9W, 750lm
<b>15 Feet</b> (Add -15FT ) 23W, 1500lm
<b>30 Feet</b> (Add -30FT ) 46W, 2900lm

**INTEGRATED LED MODULE DETAILS:**

<b>WATTS:</b> 9W, 23W, or 46W
<b>COLOR:</b> Soft White
<b>COLOR TEMPERATURE:</b> 2900K
<b>OPERATING VOLTAGE:</b> 10 VAC - 15 VAC
<b>CRI:</b> Ra>80
<b>RATED HOURS:</b> 30,000 Hours
<b>AMBIENT OPERATING TEMPERATURE:</b> ~40°C ~ +85°C
<b>DIMMING:</b> None



**HOW TO SPECIFY:** *Example: TAPE-LED-15FT*

BASE PART #	TAPE LENGTH	SUFFIX	ORDERING #
TAPE-LED	5' Length, 9W, 750lm	-5FT	TAPE-LED-5FT
	15' Length, 23W, 1500lm	-15FT	TAPE-LED-15FT
	30' Length, 46W, 2900lm	-30FT	TAPE-LED-30FT