

MODEL: FL100 | G4 BIPIN FLOOD LIGHT

Medium G4 based wall wash light. Die-cast fixture uses a solid brass knuckle and thumbscrew to adjust to the ideal angle. Brass faceplate includes a flat glass lens and is secured with 4 color matched screws. Small plastic slotted stake is provided. Dual wire lead comes pre-connected to the ceramic socket. Ideal for washing walls, planter areas and pathways with a wide flood of light. Not ideal for high foot traffic areas.

CONSTRUCTION: Solid cast brass body and faceplate. CNC brass thumbscrew. 1/2" NPT threading from stem to mount.

FINISH: Classic aged brass or premium black overcoat.

LENS: Faceplate with clear lens factory-installed. Optional frosted faceplate sold separately for field installation (model FFP100).

SOCKET: G4 Bi-Pin, spring-loaded, ceramic, with dual contacts.

MOUNTING: Pre-installed standard 8" plastic ground stake (STAKE-P1). Slotted for easy removal without having to cut the wire lead.

WIRING: Pre-Installed dual 16AWG wire leads, primary 25' wire lead, and optional 18" wire lead for daisy chaining to other fixtures. Brown wire with aged brass finish, black wire with black overcoat.

WARRANTY: Lifetime warranty on fixture housing.

CERTIFICATIONS: Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL & cETL Listed Mark.


DIMENSIONS:

Head Height _____ 5 inches

Head Width _____ 3.75 inches

Top of Stake to Knuckle _____ 2.25 inches

Ship Weight _____ 2.89 pounds

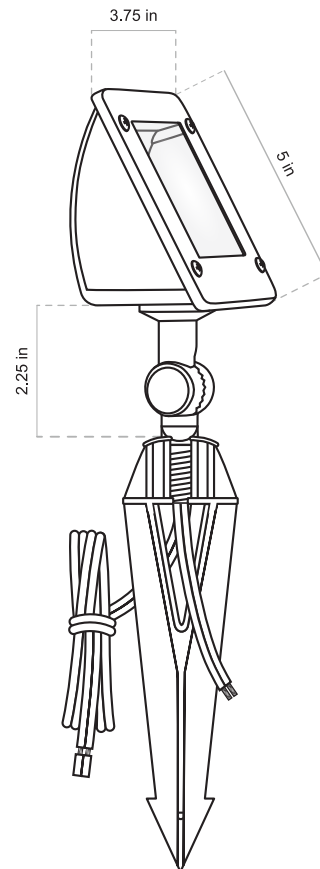

FINISH OPTIONS:

Aged Brass (Standard)
Premium Black Overcoat (Add -BLK)

G4 BIPIN LAMP OPTIONS:

ADD SUFFIX	WATTAGE	DELIVERED LUMENS	COLOR TEMP.
-LBIPIN-LED-200lm*	2.5	200	2700K
-LBIPIN-LED-250lm	3	250	2700K
-LBIPIN-LED-350lm	3.5	350	2700K

*= standard light source option

1/2" NPT MOUNTING OPTIONS (SOLD SEPARATELY):

STAKE-P1 – Slotted 8" Plastic Ground Stake
PERMAPOST – Heavy Duty Stake with Brass Locking Nut & Stabilizing Fins
RMB – Brass Round Mounting Base
RMB-BLK – Black Overcoat Brass Round Mounting Base
RISER6 – 6" Fixed Riser, Aged Brass
RISER12 – 12" Fixed Riser, Aged Brass
RISER18 – 18" Fixed Riser, Aged Brass
RISER6-BLK – 6" Fixed Riser, Premium Black
RISER12-BLK – 12" Fixed Riser, Premium Black
RISER18-BLK – 18" Fixed Riser, Premium Black

G4 LAMP ACCESSORIES:

FFP100 – Flat frosted glass lens with faceplate, used to diffuse light output.

HOW TO SPECIFY: Example: FL100-BLK-LED

BASE PART #	FINISH	SUFFIX	ORDERING #	LAMP	ORDERING #	ORDER ACCESSORIES
FL100	Aged Brass (Standard)		FL100	Add Lamp Suffix	FL100-LED	Mounting
	Black Overcoat	(Add -BLK)	FL100-BLK			Lens

