

MODEL: ALSTEM60 | G4 BIPIN AREA LIGHT STEM

Decorative 60" brass stem. Dual wire lead is provided. Includes PERMAPOST for deep ground anchoring to ensure stabilization. Lamp is sold separately. Typically combined with the TIKI hat (sold separately) to create a festive backyard environment.

CONSTRUCTION: Solid brass stem. CNC brass thumbscrew. 1/2" NPT threading from stem to mount.

FINISH: Classic aged brass or premium black overcoat.

STEM: 60" brass stem.

SOCKET: G4 Bi-Pin, spring-loaded, ceramic, with dual contacts.

MOUNTING: Heavy duty stake with brass locking nut & stabilizing fins (PERMAPOST).

WIRING: Pre-Installed dual 16AWG wire leads, primary 25' wire lead, and optional 18" wire lead for daisy chaining to other fixtures. Brown wire with aged brass finish.

WARRANTY: Lifetime warranty on fixture housing.


CERTIFICATIONS: Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL & cETL Listed Mark.

DIMENSIONS:

Stem Height _____ 60 inches

Stem Diameter _____ 1.6 inches

Ship Weight _____ 7.57 pounds

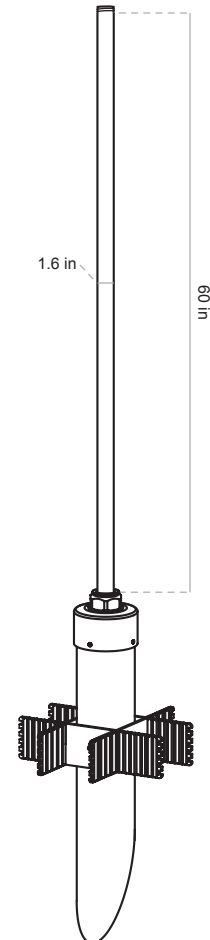

FINISH OPTIONS:

Aged Brass (Standard)
Premium Black Overcoat (Add -BLK)

G4 BIPIN LAMP OPTIONS:

ADD SUFFIX	WATTAGE	DELIVERED LUMENS	COLOR TEMP.
-LBIPIN-LED-200lm*	2.5	200	2700K
-LBIPIN-LED-250lm	3	250	2700K
-LBIPIN-LED-350lm	3.5	350	2700K

* = standard light source option



HOW TO SPECIFY: Example: ALSTEM60-LED

BASE PART #	FINISH	SUFFIX	ORDERING #	LAMP	ORDERING #	ORDER HAT
ALSTEM60	Aged Brass (Standard)		ALSTEM60	Add Lamp Suffix	ALSTEM60-LED	TIKI
	Premium Black Overcoat	-BLK	ALSTEM18-BLK			